

MYTORQ

ANLIDAR INDUSTRIAL CO.,LTD.



MY Industry 4.0
Solution

HIGH TORQUE

my tool , my solution , **MYTORQ**



FAQs

Q How to pick the right model for my application?

A When selecting a screwdriver, try to make sure that the specific torque required for the application falls somewhere near the middle of the tools torque range. For example, if you require a torque of 1 Nm, pick a tool that has a range of 2 Nm.

Q Which electric screwdriver design (straight / pistol / right-angle / right-angle z shaped) should I choose?

A **Straight** electric screwdrivers are ideal for workstations where they can be suspended by spring balancers. They are comfortable to use for vertical tightening (Top to Bottom). Straight electric screwdrivers are also designed to operate with external control on automated workstations.

Pistol electric screwdrivers have an angled body for a better grip. They are ideal to use for horizontal tightening.

Right-angle electric screwdrivers allow users to reach screws located in tight areas.

Right-angle Z Shaped electric screwdrivers enable users to tighten screws next to wall.

Q I have a fault with my tool. How do I get it repaired?

A Please contact the company you purchased it from and they will assist you.

Table of Models

Page	Series	Model	Torque			Free Speed (r.p.m)	Power Controller
			(N.m)	(kgf.cm)	(Lbf.in)		
P5	MY-SAVER	MY-SAVER 1 mini	0.1~1	1.02~10.2	0.86~8.85	980~100	MY-SAVER
		MY-SAVER 2.4F mini	0.4~2.4	4.08~24.48	3.54~21.24	2000~140	MY-SAVER
		MY-SAVER 3 mini	0.5~3	5.1~30.59	4.43~26.55	980~100	MY-SAVER
P6	MY-SAVER	MY-SAVER 3	0.6~3	6.11~30.59	5.31~26.55	1600~160	MY-SAVER
		MY-SAVER 5	1~5	10.2~51.00	8.85~44.25	1100~110	MY-SAVER
		MY-SAVER 7	1.4~7	14.27~71.39	12.39~61.96	660~70	MY-SAVER
P7	MY-SAVER	MY-SAVER 12	2.4~12	24.5~122.4	21.2~106.2	1000~100	MY-SAVER mega
		MY-SAVER 18	3.6~18	36.7~183.6	31.9~159.3	600~60	MY-SAVER mega
		MY-SAVER 25	5~25	51~254.9	44.2~221.2	400~40	MY-SAVER mega



Table of Models

Page	Series	Model	Torque(N.m)		Free Speed (r.p.m)		Screw Size Dia (mm)		Power Controller	
			Hard Joint	Soft Joint	HI	LO	Machine Screw	Tapping Screw		
P11	MYR-TR	MYR-TR0206L MYR-TR0206P	2~6	2~4.8	1200	-	4.0~5.0	≤4	MYP40-1500	
		MYR-TR0309L MYR-TR0309P	3~9	3~7.2	900	-	5.0~6.0	≤4.5	MYP40-1500	
		MYR-TR0412L MYR-TR0412P	4~12	4~9.6	600	-	≤8	≤6	MYP40-1500	
		MYR-TR0412LF MYR-TR0412PF	4~12	4~9.6	880	-	≤8	≤6	MYP40-1500	
		MYR-TR0618L MYR-TR0618P	6~18	6~14.4	370	-	≤10	≤8	MYP40-1500	
		MYR-TR0618LF MYR-TR0618PF	6~18	6~14.4	600	-	≤10	≤8	MYP40-1500	
		MYR-TR0825L MYR-TR0825P	8~25	8~20	370	-	≤10	≤8	MYP40-1500	
		MYR-TR0825LF MYR-TR0825PF	8~25	8~20	550	-	≤10	≤8	MYP40-1500	
		MYR-TR1235L MYR-TR1235P	12~35	12~28	350	-	≤12	≤10	MYP40-1500	
		MYR-TR2050L MYR-TR2050P	20~50	20~40	230	-	≤14	≤12	MYP40-1500	
		MYLR-TR	MYLR-TR0205	2~5	2~4	1200	-	≤5	≤4	MYP40-1500
			MYLR-TR0375	3~7.5	3~6	900	-	≤6	≤4.5	MYP40-1500
			MYLR-TR0610	6~10	6~8	600	-	≤8	≤6	MYP40-1500
	MYLR-TR0610F		6~10	6~8	880	-	≤8	≤6	MYP40-1500	
	MYLR-TR0815F		8~15	8~12	600	-	≤10	≤8	MYP40-1500	
	MYLR-TR0815		8~15	8~12	370	-	≤10	≤8	MYP40-1500	
	MYLR-TR1222		12~22	12~17.6	370	-	≤10	≤8	MYP40-1500	
	MYT-TR	MYT-TR0320	0.3~2.0	0.3~1.6	1200	-	2.3~3.5	2.3~3.0	MYP40-500	
		MYT-TR0830	0.8~3.0	0.8~2.4	1200	-	2.6~4.0	2.6~3.5	MYP40-500	
		MYT-TR0205	2~5	2~4	700	-	4.0~5.0	≤4	MYP40-500	
		MYT-TR0103F	1~3	1~2.4	3300	-	2.0~4.0	2.0~3.5	MYP40-1500	
		MYT-TR1235F	1.2~3.5	1.2~2.8	1700	-	2.6~4.0	2.6~3.5	MYP40-1500	
		MYT-TR0205F	2~5	2~4	1000	-	4.0~5.0	≤4	MYP40-1500	
		MYT-TR2507	2.5~7	2.5~5.6	850	-	5.0~6.0	≤5	MYP40-1500	
		MYT-TR0206	2~6	2~4.8	1000	-	4.0~5.0	≤4	MYP40-1500	
		MYT-TR0309	3~9	3~7.2	800	-	5.0~6.0	≤4.5	MYP40-1500	
		MYT-TR0412	4~12	4~9.6	550	-	≤8	≤6	MYP40-1500	
		MYT-TR0618	6~18	6~14.4	350	-	≤10	≤8	MYP40-1500	
	MY9-TR	MY9-TR0206L MY9-TR0206P	2~6	2~4.8	1000	-	4.0~5.0	≤4	MYP40-1500	
		MY9-TR0206LF MY9-TR0206PF	2~6	2~4.8	2000	-	4.0~5.0	≤4	MYP40-1500	
		MY9-TR0309L MY9-TR0309P	3~9	3~7.2	1000	-	≤6	≤5	MYP40-1500	
		MY9-TR0612L MY9-TR0612P	6~12	6~9.6	880	-	≤8	≤6	MYP40-1500	
	MY8-TR	MY8-TR0205L MY8-TR0205P	1.96~4.90	1.96~3.92	1000	-	4.0~5.0	≤4	MYP40-500	
	MY7-TR	MY7-TR1030L MY7-TR1030P	0.98~2.94	0.98~2.35	1200	900	2.6~4.0	2.6~3.5	MYP32-300	
		MY7-TR0522LF MY7-TR0522PF	0.49~2.16	-	2000	-	2.6~4.0	2.6~3.5	MYP32-300	




Table of Models

Page	Series	Model	Torque(N.m)		Free Speed (r.p.m)		Screw Size Dia (mm)		Power Controller
			Hard Joint	Soft Joint	HI	LO	Machine Screw	Tapping Screw	
P13	MYR	MYR-0206L MYR-0206P	2~6	2~4.8	1200	-	4.0~5.0	≤4	MYP40-1500
		MYR-0309L MYR-0309P	3~9	3~7.2	900	-	5.0~6.0	≤4.5	MYP40-1500
		MYR-0412L MYR-0412P	4~12	4~9.6	600	-	≤8	≤6	MYP40-1500
		MYR-0412LF MYR-0412PF	4~12	4~9.6	880	-	≤8	≤6	MYP40-1500
		MYR-0618L MYR-0618P	6~18	6~14.4	370	-	≤10	≤8	MYP40-1500
		MYR-0618LF MYR-0618PF	6~18	6~14.4	600	-	≤10	≤8	MYP40-1500
		MYR-0825L MYR-0825P	8~25	8~20	370	-	≤10	≤8	MYP40-1500
P14	MYR	MYR-0825LF MYR-0825PF	8~25	8~20	550	-	≤10	≤8	MYP40-1500
		MYR-1235L MYR-1235P	12~35	12~28	350	-	≤12	≤10	MYP40-1500
		MYR-2050L MYR-2050P	20~50	20~40	230	-	≤14	≤12	MYP40-1500
	MYLR	MYLR-0205	2~5	2~4	1200	-	≤5	≤4	MYP40-1500
		MYLR-0375	3~7.5	3~6	900	-	≤6	≤4.5	MYP40-1500
		MYLR-0610	6~10	6~8	600	-	≤8	≤6	MYP40-1500
		MYLR-0610F MYLR-0815F	6~10 8~15	6~8 8~12	880 600	- -	≤8 ≤10	≤6 ≤8	MYP40-1500 MYP40-1500
MYLR-0815	8~15	8~12	370	-	≤10	≤8	MYP40-1500		
MYLR-1222	12~22	12~17.6	370	-	≤10	≤8	MYP40-1500		
P15	MYT	MYT-0320	0.3~2.0	0.3~1.6	1200	-	2.3~3.5	2.3~3.0	MYP40-500
		MYT-0830	0.8~3.0	0.8~2.4	1200	-	2.6~4.0	2.6~3.5	MYP40-500
		MYT-0205	2~5	2~4	700	-	4.0~5.0	≤4	MYP40-500
		MYT-0103F	1~3	1~2.4	3300	-	2.0~4.0	2.0~3.5	MYP40-1500
		MYT-1235F	1.2~3.5	1.2~2.8	1700	-	2.6~4.0	2.6~3.5	MYP40-1500
		MYT-0205F	2~5	2~4	1000	-	4.0~5.0	≤4	MYP40-1500
		MYT-2507	2.5~7	2.5~5.6	850	-	5.0~6.0	≤5	MYP40-1500
		MYT-0206	2~6	2~4.8	1000	-	4.0~5.0	≤4	MYP40-1500
		MYT-0309	3~9	3~7.2	800	-	5.0~6.0	≤4.5	MYP40-1500
		MYT-0412	4~12	4~9.6	550	-	≤8	≤6	MYP40-1500
MYT-0618	6~18	6~14.4	350	-	≤10	≤8	MYP40-1500		
P16	MY9	MY9-0206L MY9-0206P	2~6	2~4.8	1000	-	4.0~5.0	≤4	MYP40-1500
		MY9-TR0206LF MY9-TR0206PF	2~6	2~4.8	2000	-	4.0~5.0	≤4	MYP40-1500
		MY9-0309L MY9-0309P	3~9	3~7.2	1000	-	≤6	≤5	MYP40-1500
		MY9-0612L MY9-0612P	6~12	6~9.6	880	-	≤8	≤6	MYP40-1500
P17	MY8-EP	MY8-EP0103L MY8-EP0103P	0.98~2.94	0.98~2.35	1000	-	2.6~4.0	2.6~3.5	MYP40-500
		MY8-EP0103LF MY8-EP0103PF	0.98~2.94	0.98~2.35	2000	-	2.6~4.0	2.6~3.5	MYP40-500
		MY8-EP0205L MY8-EP0205P	1.96~4.90	1.96~3.92	1000	-	4.5~5.0	≤4	MYP40-500
P18	MY8	MY8-0205L MY8-0205P	1.96~4.90	1.96~3.92	1000	-	4.0~5.0	≤4	MYP40-500
	MY7	MY7-1030L MY7-1030P	0.98~2.94	0.98~2.35	1200	900	2.6~4.0	2.6~3.5	MYP32-300
		MY7-0522LF MY7-0522PF	0.49~2.16	-	2000	-	2.6~4.0	2.6~3.5	MYP32-300

MY-SAVER controller



External Dimension

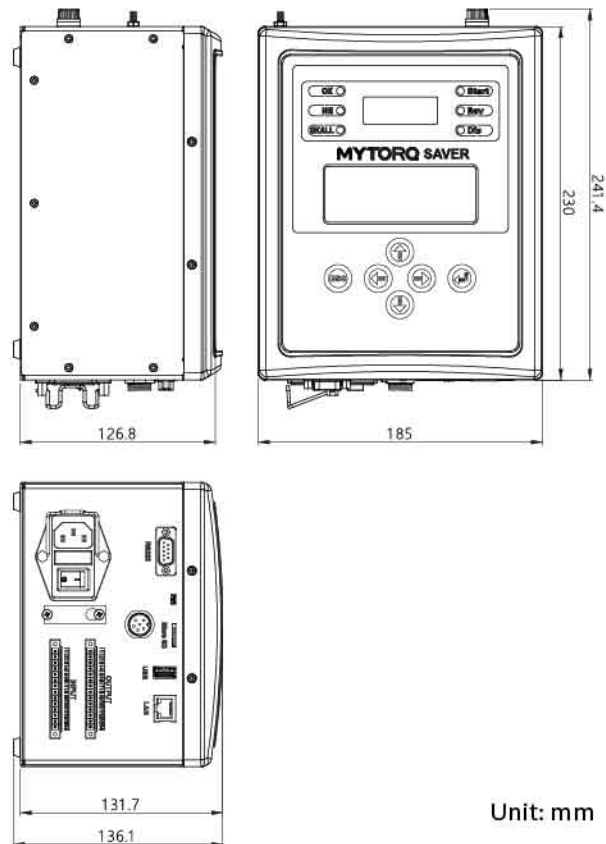

Unit: mm

Features

- High precision and reliable made in Germany torque transducer.
- Cost effective torque control screw tightening solution.
- RS232 / ethernet interfaces for data collection.
- SD card available for temporary data storage. (Support 32GB and below)
- Screw tightening can be broken down into 5 steps for process control. (Torque/Thread/RPM/Forward/Reverse)
- Save up to 250 steps, 50 sequences & 50 jobs.
- Can quickly switch between sequence & job, suitable for low volume high mix order.
- Low maintenance cost

Specifications

Model	MY-SAVER	MY-SAVER mega
Input Voltage	AC 115 / 230V 50-60Hz	
Output Voltage	DC 40V	
Count	1~99	
Count method	Count-up / Count-down	
Detection torque value	According to the screwdriver specifications	
Detection screw thread number	0.0~999.9	
External connection input	Start / Reverse / Disable / Confirm / Cleared / Gate / Sequence	
External connection output	OK/NG/OK ALL/Start/Reverse	
Serial interface	RS-232 , Micro SD , LAN	
Assembly management	MY-DAS / MY Assembly Office	
External dimensions	241 x 185 x127 (mm)	
Weight(Kg)	3.4 Kg	
Applicable Models	MY-SAVER 3 mini MY-SAVER 3 / 5 / 7	MY-SAVER 12 MY-SAVER 18 MY-SAVER 25

MYTORQ INDUSTRY 4.0


DC High Precision Torque Transducer Screwdriver



MY-SAVER 1 / 2.4F / 3 mini




External Dimension

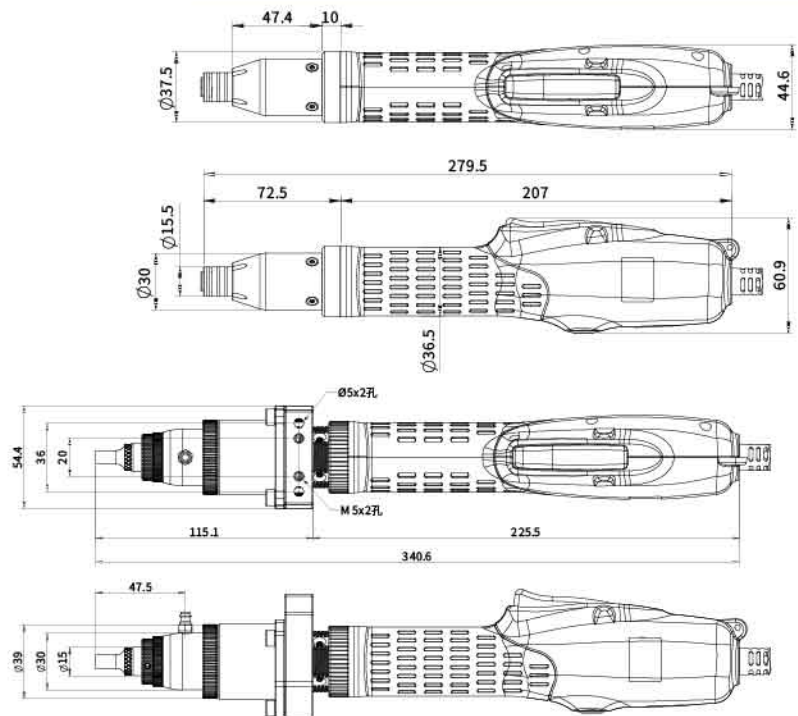

Unit: mm

Bit nozzle specification				
PART NO	d1	d2	D	H
P11032-15	3.5	5.5	6.5	2
P11032-17	4.5	6.5	7.5	2
P11032-18	5.5	7.5	8.5	2



Accessories









Features

- Made in Germany high precision torque transducer. < 1% tolerance
- Adopted brushless motor for clean, quiet, and accurate operation
- Durable mechanical design screwdriver is able to perform tightening for over 2 million times
- Wide torque range is applicable for various high tech workpieces
- Ergonomic designed to comfort user for long time operation
- 3 options LED illumination
- 4 optional start types

Specifications

Model	Torque			Free Speed (r.p.m)	Weight (g)	Length (mm)	Power Controller	Bit Type
	(N.m)	(kgf.cm)	(Lbf.in)					
MY-SAVER 1 mini	0.1~1	1.02~10.2	0.86~8.85	980~100	680	280	MY-SAVER	B、B 9.5、C、D
MY-SAVER 2.4F mini	0.4~2.4	4.08~24.48	3.54~21.24	2000~140	680	280	MY-SAVER	B、B 9.5、D
MY-SAVER 3 mini	0.5~3	5.1~30.59	4.43~26.55	980~100	680	280	MY-SAVER	B、B 9.5、D

※CE、RoHS



MYTORQ INDUSTRY 4.0

DC High Precision Torque Transducer Screwdriver



MYTORQ
ANLIDAR INDUSTRIAL CO., LTD.

MY-SAVER 3 / 5 / 7





External Dimension

M34*P1.0
LH Reverse Thread

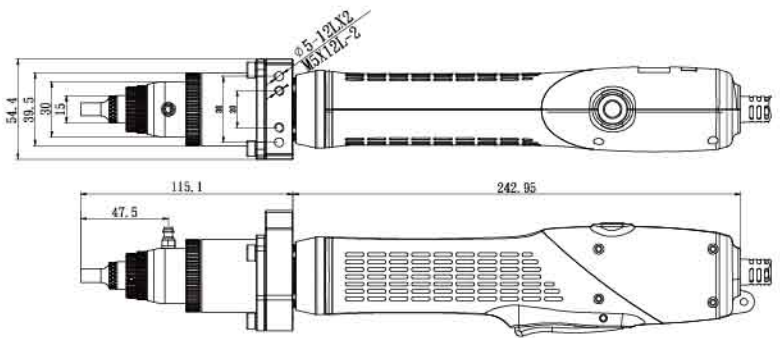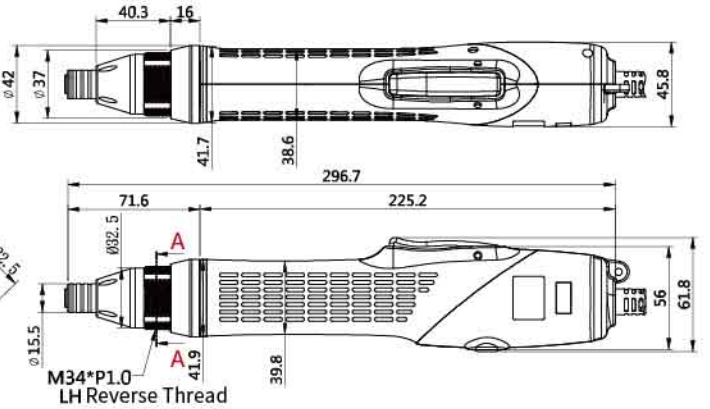

Bit nozzle specification

PART NO	d1	d2	D	H
P11032-15	3.5	5.5	6.5	2
P11032-17	4.5	6.5	7.5	2
P11032-18	5.5	7.5	8.5	2

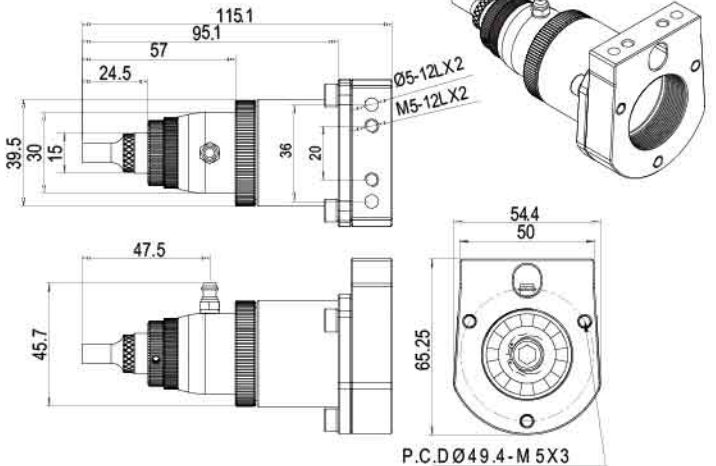

Unit: mm

Accessories

Screwdriver Holder
KH-2L



Screwdriver Holder
KH-6




Pistol Grip
LG-15S



Specifications

Model	Torque			Free Speed (r.p.m)	Weight (g)	Length (mm)	Power Controller	Bit Type
	(N.m)	(kgf.cm)	(Lbf.in)					
MY-SAVER 3	0.6~3	6.11~30.59	5.31~26.55	1600~160	830	297	MY-SAVER	A·B 9.5·D
MY-SAVER 5	1~5	10.2~51.00	8.85~44.25	1100~110	830	297	MY-SAVER	A·B 9.5
MY-SAVER 7	1.4~7	14.27~71.39	12.39~61.96	660~70	830	297	MY-SAVER	B 9.5

※CE、RoHS



MYTORQ INDUSTRY 4.0

DC High Precision Torque Transducer Screwdriver


MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.

MY-SAVER 12 / 18 / 25



MY-SAVER 12 / 18 MY-SAVER 25

External Dimension

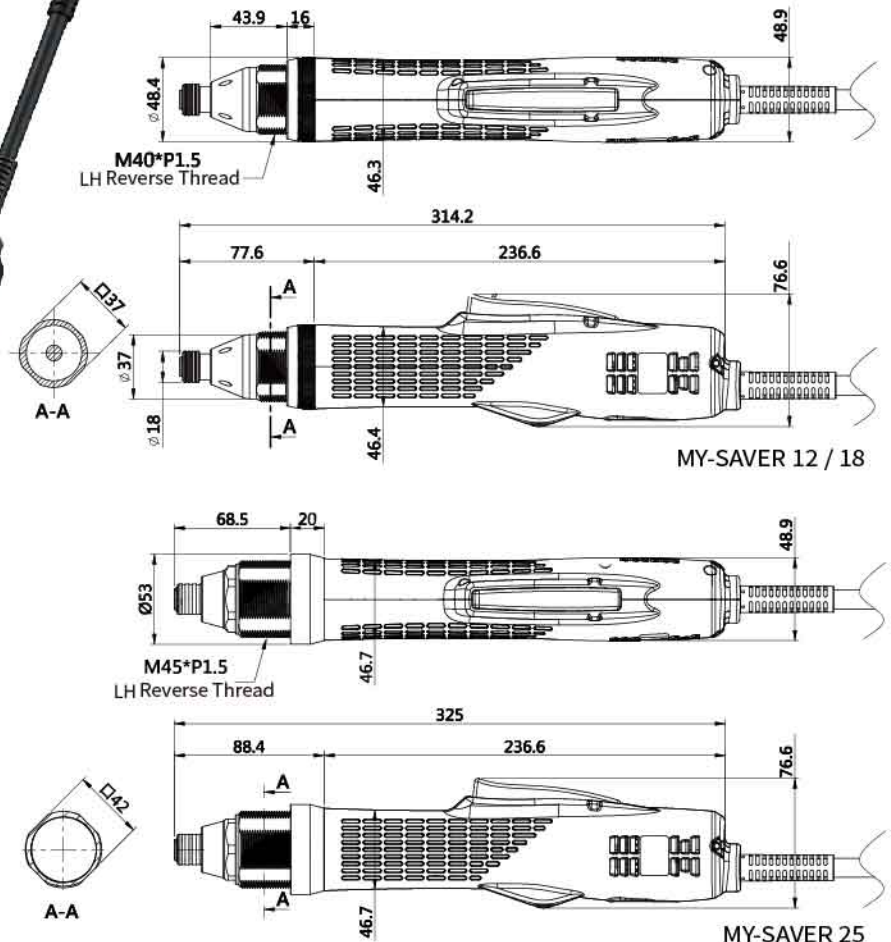

MY-SAVER 12 / 18

MY-SAVER 25

Unit: mm

Features

- Made in Germany high precision torque transducer. < 1% tolerance
- Adopted brushless motor for clean, quiet, and accurate operation
- Durable mechanical design screwdriver is able to perform tightening for over 2 million times
- Wide torque range is applicable for various high tech workpieces
- Ergonomic designed to comfort user for long time operation
- 3 options LED illumination
- 4 optional start types


Accessories



Specifications

Model	Torque			Free Speed (r.p.m)	Weight (g)	Length (mm)	Power Controller	Bit Type
	(N.m)	(kgf.cm)	(Lbf.in)					
MY-SAVER 12	2.4~12	24.5~122.4	21.2~106.2	1000~100	1130	314	MY-SAVER mega	B 9.5 · W 3/8"
MY-SAVER 18	3.6~18	36.7~183.6	31.9~159.3	600~60	1130	314	MY-SAVER mega	B 9.5 · W3/8"
MY-SAVER 25	5~25	51~254.9	44.2~221.2	400~40	1790	325	MY-SAVER mega	B 9.5 · W3/8"

※CE、RoHS




MY-TR/TR5

Product Features

- 4 digits and 7 Segment of torque display
- 16 x 2 LCM display settings
- Password and key control to avoid operator adjusting settings.
- Counting preference set up (count up and count down)
- Slow start time 0.0-9.9 sec
- Slow start speed (10%~90%,L1~L9)
- Workpiece in position sensor (on/off)
- Monitor fastening thread range
- I/O signal (mos-relay)
- RS-232 interface for data output, storage and use with barcode scanner
- Save up to 99 programs
- Monitor fastening time range
- Monitor fastening torque range
- Error code
- Auto learning
- Change torque unit
- Offset setting
- External start
- External reverse
- External disable tool
- External confirm

MY-TR System Schematic (MY-TR(5) Applicable to TR Series Screwdrivers)

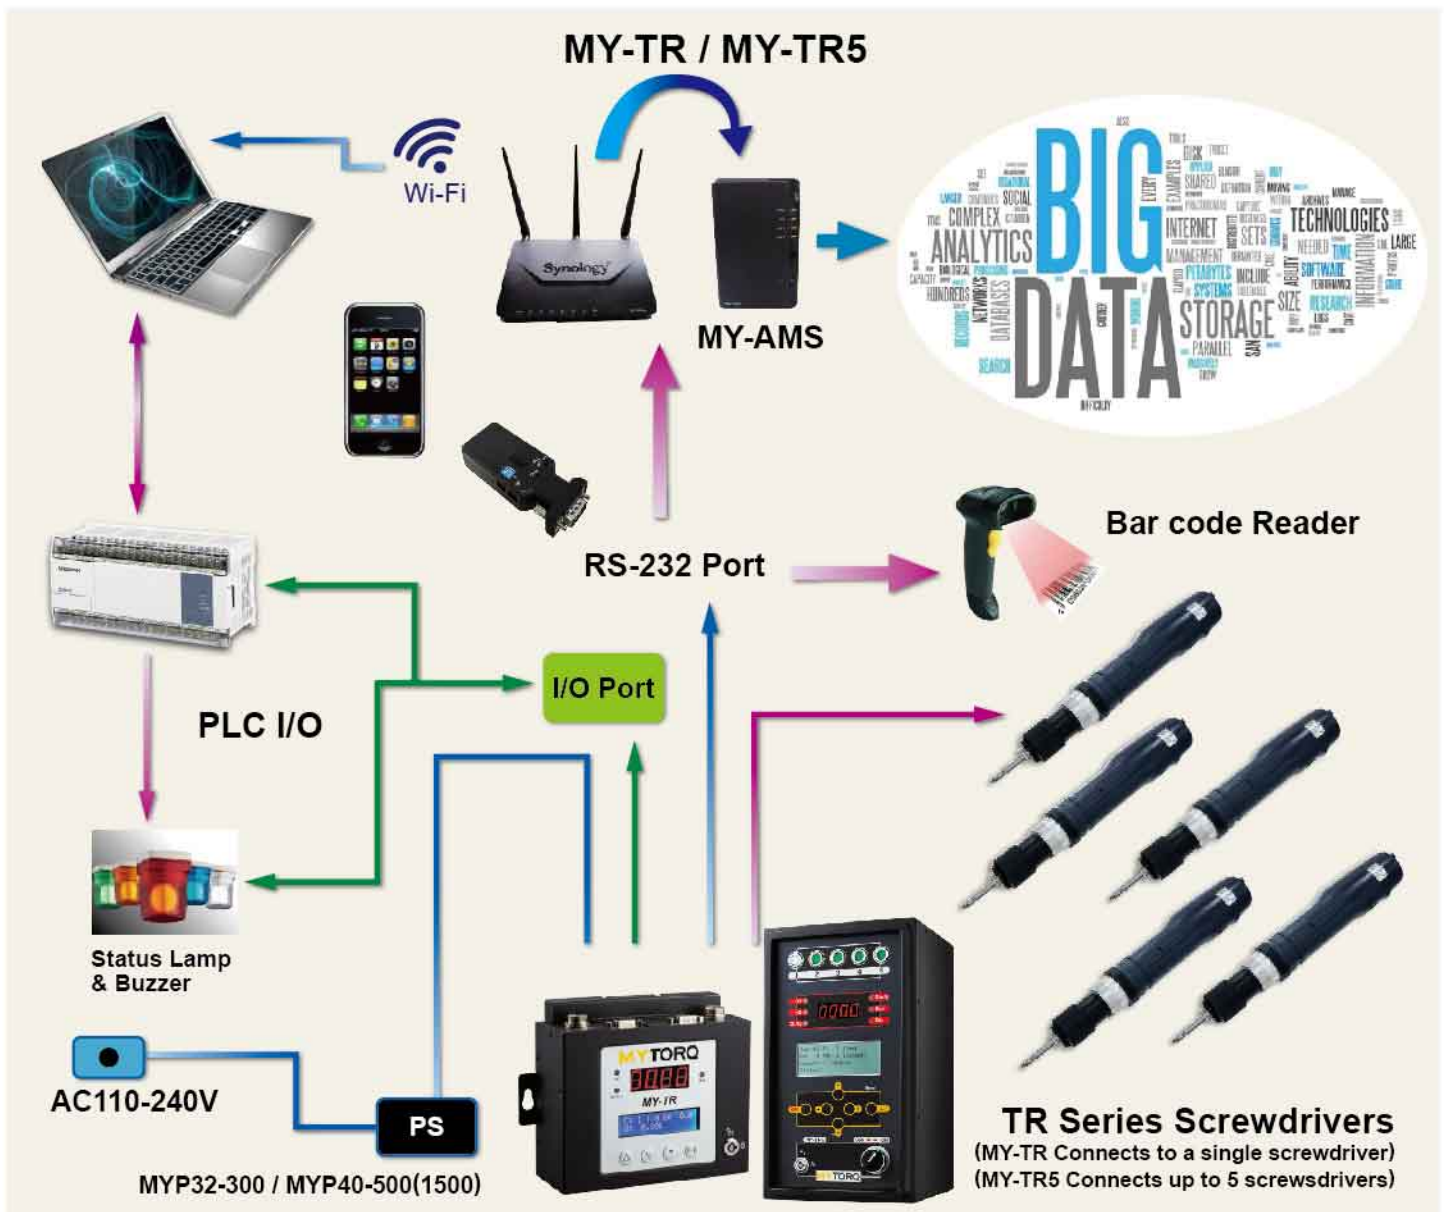

MY-TR



TAIWAN
EXCELLENCE
2018




Features

In the era of industry 4.0, assembly data collection and integration is becoming a must. In order to meet market demands, Anlidar's latest invention MY-TR is able to display tightening torque, output tightening torque, output tightening status, storage tightening torque and together with error proof functions.

MY-TR is also able to prevent errors from tightening torque, tightening number of threads, and tightening time. With various I/O, MY-TR can be connected to your PLC and integrated with your automation equipment and output assembly status instantly to your sever or private cloud by ethernet or WIFI for traceability.



External Dimension

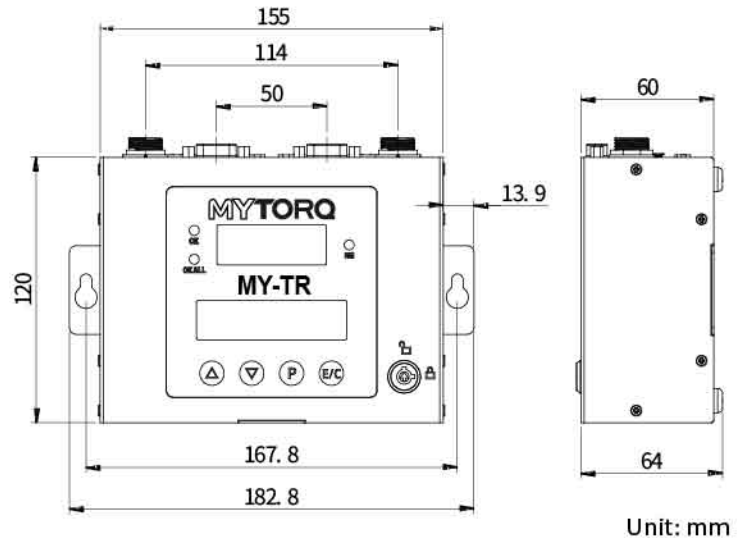

Specifications

Model	MY-TR
Input Voltage	DC 32V/ 40V
I/O Output Voltage	DC 24V 50mA/12V 100mA
Batch Count	1-250
Count method	Count-up / Count-down
Continued induction switch(sensor)	ON/OFF
Sensor switch mode	ON(2 Sensors) / OFF(1 Sensor)
Slow start time setting	0~9.9 seconds
Slow start speed setting	L0:100%,10%~90% L1~L9 Rated speed
Stop time detection	0.00~9.99 seconds
Torque value detection	0.0~550.00kgf.cm
Screw thread detection	0.0~999.9
External signal input	Start / Reverse / Disable / Confirm / Cleared / Gate / Sequence cleared
External signal output	OK / NG / OK ALL / STOP
Serial interface	RS-232X2
Assembly management	MY-DAS / MY-AMS
external dimensions	155X120X60(mm)
Weight(g)	630g
Accessories	Power cableX1 KeyX2
Applicable Models	MY2-TR MYT-TR MY5-TR MY7-TR MY8-TR MY9-TR MYR-TR MYLR-TR


MY-TR5



**TAIWAN
EXCELLENCE
2019**



External Dimension

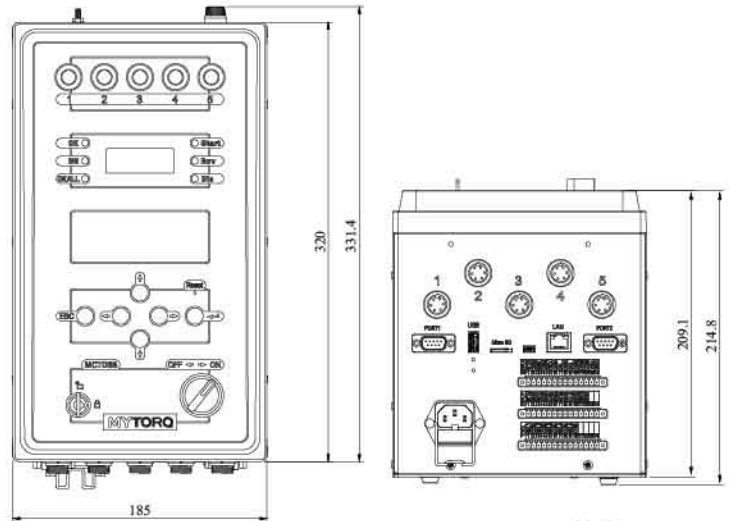

Unit: mm

Features

- 4 digits and 7 Segment of torque display
- 24x4 LCM display settings
- Password and key control to avoid operator adjusting settings.
- Counting preference set up (count up and count down)
- Slow start time 0.0-9.9 sec
- Slow start speed (10%~90%,L1~L9)
- Workpiece in position sensor (on/off)
- Monitor fastening thread range
- I/O signal (mos-relay)
- RS-232 interface for data output, storage and use with barcode scanner
- Save up to 99 programs
- Monitor fastening time range
- Monitor fastening torque range
- Error code
- Auto learning
- Change torque unit
- Offset setting
- External start
- External reverse
- External disable tool
- External confirm
- Slot for SD memory card (Support 32GB and below)
- Built-in power
- Ethernet
- Save up to 99 sequences

Specifications

Model	MY-TR5
Input Voltage	AC 100V ~ 240V
I/O Output Voltage	DC 24V 50mA / 12V 100mA
Batch Count	1-99
Count method	Count-up / Count-down
Continued induction switch(sensor)	ON/OFF
Sensor switch mode	ON(2 Sensors) / OFF(1 Sensor)
Slow start time setting	0~9.9 seconds
Slow start speed setting	L0:100%,10%~90% L1~L9 Rated speed
Stop time detection	0.00~9.99 seconds
Torque value detection	0.0~550.0 kgf.cm
Screw thread detection	0.0~999.9
External signal input	Start / Reverse / Disable / Confirm / Cleared / Gate
External signal output	OK / NG / OK ALL / STOP
Serial interface	RS-232X2
Assembly management	MY-DAS / MY-AMS
External dimensions	185 x320x209(mm)
Weight	5.55KG
Accessories	Power cableX1 KeyX2
Applicable Models	MY2-TR MYT-TR MY5-TR MY7-TR MY8-TR MY9-TR MYR-TR MYLR-TR


BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER AND PUSH START CLUTCH TYPE SERIES

MYR-TR / MYLR-TR / MYT-TR / MY9-TR / MY8-TR / MY7-TR Series

Specifications (Use with MY-TR / MY-TR5 only.)

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (kg)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MYR-TR0206L MYR-TR0206P	2~6	2~4.8	±5%	1200	-	4.0~5.0	≤4	1.25	315	MYP40-1500	B、B 9.5、W 3/8"
MYR-TR0309L MYR-TR0309P	3~9	3~7.2	±5%	900	-	5.0~6.0	≤4.5	1.25	315	MYP40-1500	B、B 9.5、W 3/8"
MYR-TR0412L MYR-TR0412P	4~12	4~9.6	±5%	600	-	≤8	≤6	1.25	315	MYP40-1500	B、B 9.5、W 3/8"
MYR-TR0412LF MYR-TR0412PF	4~12	4~9.6	±5%	880	-	≤8	≤6	1.25	315	MYP40-1500	B、B 9.5、W 3/8"
MYR-TR0618L MYR-TR0618P	6~18	6~14.4	±5%	370	-	≤10	≤8	1.25	315	MYP40-1500	B、B 9.5、W 3/8"
MYR-TR0618LF MYR-TR0618PF	6~18	6~14.4	±5%	600	-	≤10	≤8	1.25	315	MYP40-1500	B、B 9.5、W 3/8"
MYR-TR0825L MYR-TR0825P	8~25	8~20	±5%	370	-	≤10	≤8	1.25	315	MYP40-1500	B、B 9.5、W 3/8"
MYR-TR0825LF MYR-TR0825PF	8~25	8~20	±5%	550	-	≤10	≤8	2.2	380	MYP40-1500	B、B 9.5、W 3/8"
MYR-TR1235L MYR-TR1235P	12~35	12~28	±5%	350	-	≤12	≤10	2.2	380	MYP40-1500	B、B 9.5、W 3/8"、W 1/2"
MYR-TR2050L MYR-TR2050P	20~50	20~40	±5%	230	-	≤14	≤12	2.2	380	MYP40-1500	W 1/2"
MYLR-TR0205	2~5	2~4	±5%	1200	-	≤5	≤4	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-TR0375	3~7.5	3~6	±5%	900	-	≤6	≤4.5	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-TR0610	6~10	6~8	±5%	600	-	≤8	≤6	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-TR0610F	6~10	6~8	±5%	880	-	≤8	≤6	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-TR0815F	8~15	8~12	±5%	600	-	≤10	≤8	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-TR0815	8~15	8~12	±5%	370	-	≤10	≤8	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-TR1222	12~22	12~17.6	±5%	370	-	≤10	≤8	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYT-TR0320	0.3~2.0	0.3~1.6	±5%	1200	-	2.3~3.5	2.3~3.0	0.7	185X150	MYP40-500	A、B、B 9.5
MYT-TR0830	0.8~3.0	0.8~2.4	±5%	1200	-	2.6~4.0	2.6~3.5	0.7	185X150	MYP40-500	A、B、B 9.5
MYT-TR0205	2~5	2~4	±5%	700	-	4.0~5.0	≤4	0.7	185X150	MYP40-500	A、B、B 9.5
MYT-TR0103F	1~3	1~2.4	±5%	3300	-	2.0~4.0	2.0~3.5	0.7	185X150	MYP40-1500	A、B、B 9.5
MYT-TR1235F	1.2~3.5	1.2~2.8	±5%	1700	-	2.6~4.0	2.6~3.5	0.7	185X150	MYP40-1500	A、B、B 9.5
MYT-TR0205F	2~5	2~4	±5%	1000	-	4.0~5.0	≤4	0.7	185X150	MYP40-1500	B、B 9.5
MYT-TR2507	2.5~7	2.5~5.6	±5%	850	-	5.0~6.0	≤5	0.7	185X150	MYP40-1500	B、B 9.5
MYT-TR0206	2~6	2~4.8	±5%	1000	-	4.0~5.0	≤4	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"
MYT-TR0309	3~9	3~7.2	±5%	800	-	5.0~6.0	≤4.5	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"
MYT-TR0412	4~12	4~9.6	±5%	550	-	≤8	≤6	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"
MYT-TR0618	6~18	6~14.4	±5%	350	-	≤10	≤8	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"
MY9-TR0206L MY9-TR0206P	2~6	2~4.8	±5%	1000	-	4.0~5.0	≤4	1.03	306	MYP40-1500	B、B 9.5
MY9-TR0206LF MY9-TR0206PF	2~6	2~4.8	±5%	2000	-	4.0~5.0	≤4	1.03	306	MYP40-1500	B、B 9.5
MY9-TR0309L MY9-TR0309P	3~9	3~7.2	±5%	1000	-	≤6	≤5	1.03	306	MYP40-1500	B、B 9.5
MY9-TR0612L MY9-TR0612P	6~12	6~9.6	±5%	880	-	≤8	≤6	1.03	306	MYP40-1500	B、B 9.5
MY8-TR0205L MY8-TR0205P	1.96~4.90	1.96~3.92	±3%	1000	-	4.0~5.0	≤4	790(g)	290	MYP40-500	B、B 9.5
MY7-TR1030L MY7-TR1030P	0.98~2.94	0.98~2.35	±3%	1200	900	2.6~4.0	2.6~3.5	790(g)	290	MYP32-300	A、B、B 9.5
MY7-TR0522LF MY7-TR0522PF	0.49~2.16	-	±3%	2000	-	2.6~4.0	2.6~3.5	790(g)	290	MYP32-300	A、B、B 9.5


※ CE、RoHS



MYP Series [MYP40-500, MYP40-1500]



External Dimension

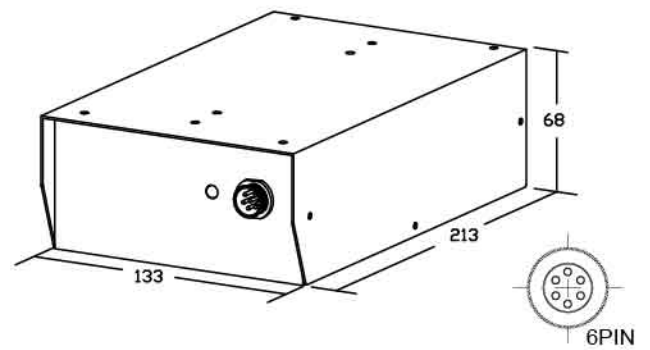

Specifications

Model	MYP40-500	MYP40-1500
Input Voltage	AC 100-240V 50/60Hz	AC 115V/230V 50/60Hz
Output Voltage	DC40V	DC40V
Capacity	6.3A	9A
Outside Dimensions	213X133X68(mm)	213X133X68(mm)
Weight(g)	1800g	1800g
AC Cord Length	2M with ground	2M with ground
Remark (optional)	   	
Applicable Models	MY8 series MY8-TR series MY8-EP series MYT-0320/0825F/0830/0205 MYT-TR 0320/0825F/0830/0205	MY9series MY9-TR series MYR series MYR-TR series MYLR series MYLR-TR series MYT series MYT-TR series

BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER AND PUSH START CLUTCH TYPE SERIES


MYR Series



(Optional)




External Dimension

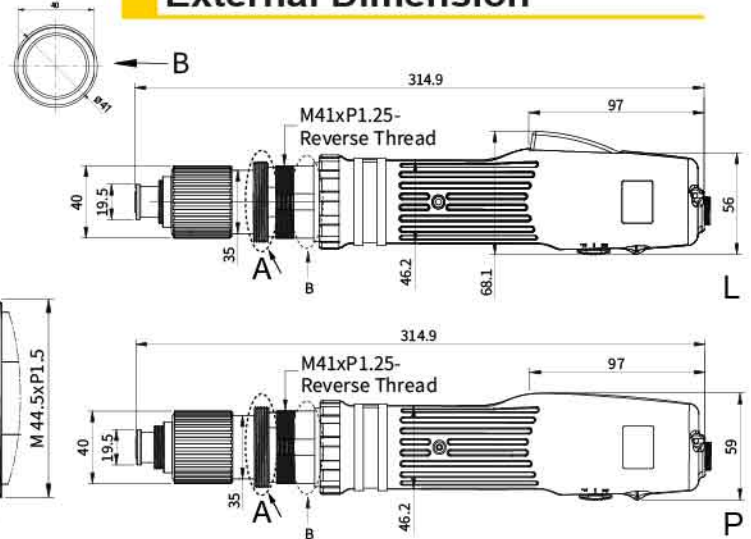

Unit: mm

Torque Range Reference Chart

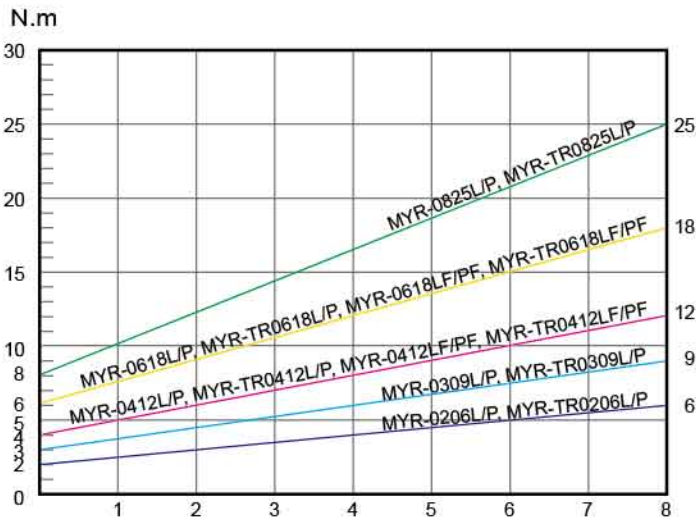

Accessories

Power Controller
MYP40-1500



Spring Balancer
KL-2000



Torque Locker
KC-22A




Spiral Cable



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (kg)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MYR-0206L MYR-0206P	2~6	2~4.8	±5%	1200	-	4.0~5.0	≤4	1.25	315	MYP40-1500	B · B 9.5 · W 3/8"
MYR-0309L MYR-0309P	3~9	3~7.2	±5%	900	-	5.0~6.0	≤4.5	1.25	315	MYP40-1500	B · B 9.5 · W 3/8"
MYR-0412L MYR-0412P	4~12	4~9.6	±5%	600	-	≤8	≤6	1.25	315	MYP40-1500	B · B 9.5 · W 3/8"
MYR-0412LF MYR-0412PF	4~12	4~9.6	±5%	880	-	≤8	≤6	1.25	315	MYP40-1500	B · B 9.5 · W 3/8"
MYR-0618L MYR-0618P	6~18	6~14.4	±5%	370	-	≤10	≤8	1.25	315	MYP40-1500	B · B 9.5 · W 3/8"
MYR-0618LF MYR-0618PF	6~18	6~14.4	±5%	600	-	≤10	≤8	1.25	315	MYP40-1500	B · B 9.5 · W 3/8"
MYR-0825L MYR-0825P	8~25	8~20	±5%	370	-	≤10	≤8	1.25	315	MYP40-1500	B · B 9.5 · W 3/8"




※ CE、RoHS

BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER AND PUSH START CLUTCH TYPE SERIES


MYR / MYLR Series



External Dimension

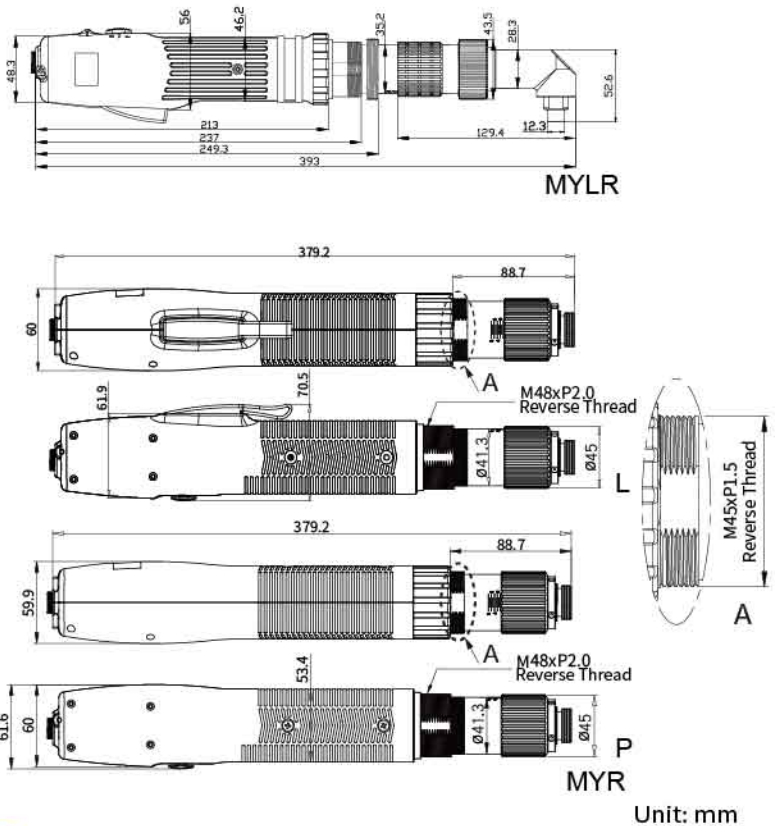

Torque Range Reference Chart

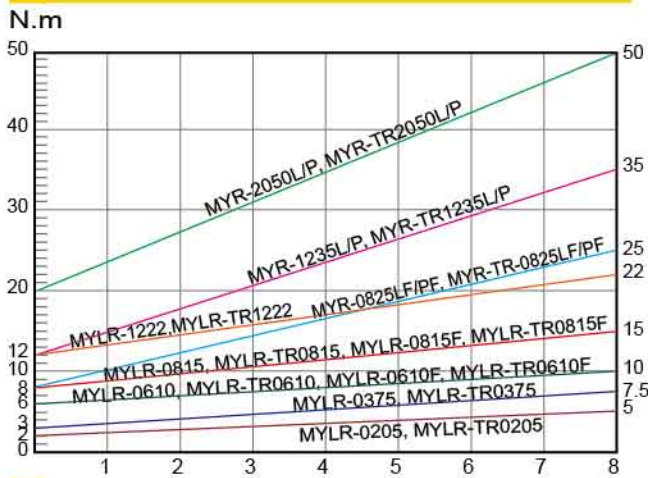


Accessories



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (kg)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MYR-0825LF MYR-0825PF	8~25	8~20	±5%	550	-	≤10	≤8	2.2	380	MYP40-1500	B、B 9.5、W 3/8"
MYR-1235L MYR-1235P	12~35	12~28	±5%	350	-	≤12	≤10	2.2	380	MYP40-1500	B、B 9.5、W 3/8"、W 1/2"
MYR-2050L MYR-2050P	20~50	20~40	±5%	230	-	≤14	≤12	2.2	380	MYP40-1500	W 1/2"
MYLR-0205	2~5	2~4	±5%	1200	-	≤5	≤4	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-0375	3~7.5	3~6	±5%	900	-	≤6	≤4.5	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-0610	6~10	6~8	±5%	600	-	≤8	≤6	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-0610F	6~10	6~8	±5%	880	-	≤8	≤6	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-0815F	8~15	8~12	±5%	600	-	≤10	≤8	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-0815	8~15	8~12	±5%	370	-	≤10	≤8	2.5	393	MYP40-1500	B 9.5、W 3/8"
MYLR-1222	12~22	12~17.6	±5%	370	-	≤10	≤8	2.5	393	MYP40-1500	B 9.5、W 3/8"

※CE、RoHS




BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER CLUTCH TYPE SERIES


MYT Series



Torque Range Reference Chart

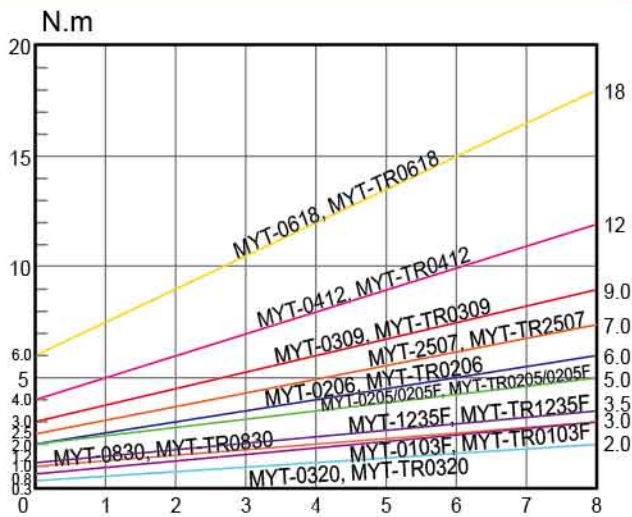

External Dimension

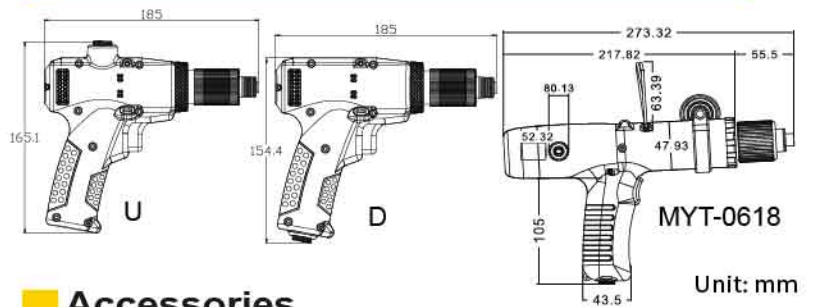


Accessories



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (kg)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MYT-0320	0.3~2.0	0.3~1.6	±5%	1200	-	2.3~3.5	2.3~3.0	0.7	185X150	MYP40-500	A、B、B 9.5
MYT-0830	0.8~3.0	0.8~2.4	±5%	1200	-	2.6~4.0	2.6~3.5	0.7	185X150	MYP40-500	A、B、B 9.5
MYT-0205	2~5	2~4	±5%	700	-	4.0~5.0	≤4	0.7	185X150	MYP40-500	A、B、B 9.5
MYT-0103F	1~3	1~2.4	±5%	3300	-	2.0~4.0	2.0~3.5	0.7	185X150	MYP40-1500	A、B、B 9.5
MYT-1235F	1.2~3.5	1.2~2.8	±5%	1700	-	2.6~4.0	2.6~3.5	0.7	185X150	MYP40-1500	A、B、B 9.5
MYT-0205F	2~5	2~4	±5%	1000	-	4.0~5.0	≤4	0.7	185X150	MYP40-1500	B、B 9.5
MYT-2507	2.5~7	2.5~5.6	±5%	850	-	5.0~6.0	≤5	0.7	185X150	MYP40-1500	B、B 9.5
MYT-0206	2~6	2~4.8	±5%	1000	-	4.0~5.0	≤4	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"
MYT-0309	3~9	3~7.2	±5%	800	-	5.0~6.0	≤4.5	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"
MYT-0412	4~12	4~9.6	±5%	550	-	≤8	≤6	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"
MYT-0618	6~18	6~14.4	±5%	350	-	≤10	≤8	1.2	274X160	MYP40-1500	B、B 9.5、W 3/8"

※ CE、RoHS




BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER AND PUSH START CLUTCH TYPE SERIES

MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.


MY9 Series




External Dimension

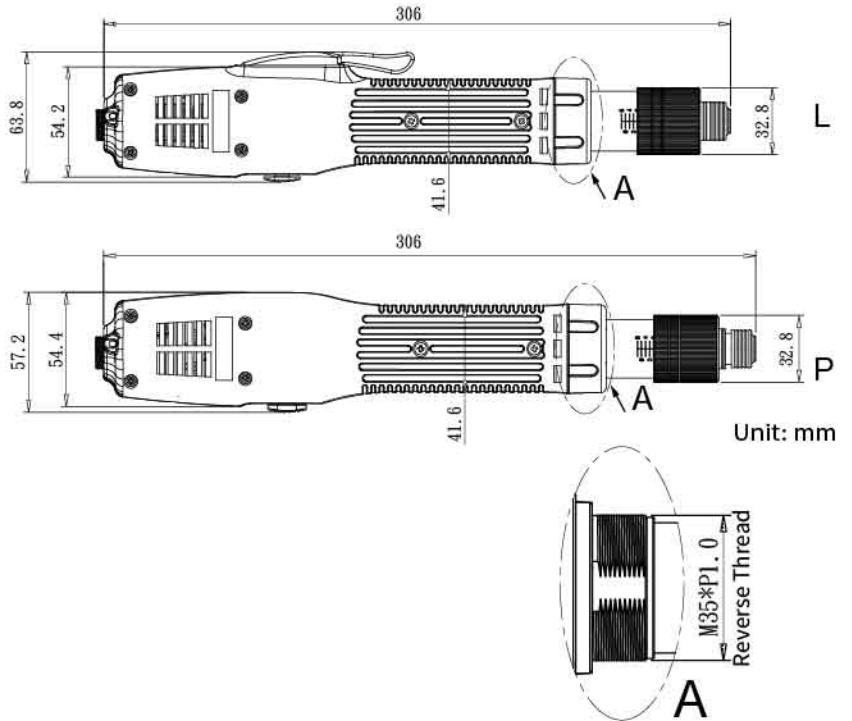

Torque Range Reference Chart

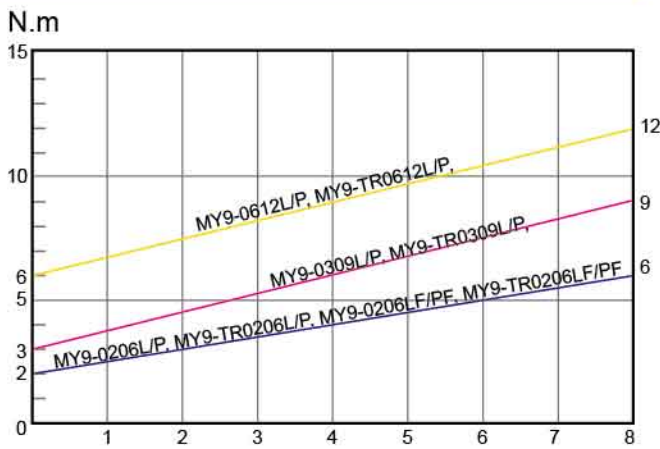


Accessories

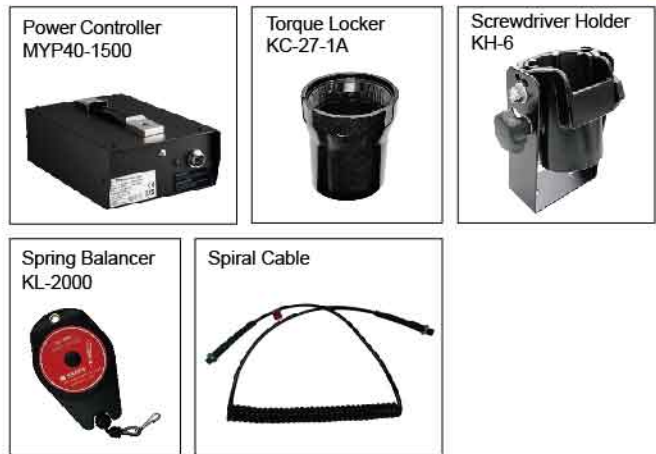

Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (kg)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MY9-0206L MY9-0206P	2-6	2-4.8	±5%	1000	-	4.0-5.0	≤4	1.03	306	MYP40-1500	B、B 9.5
MY9-0206LF MY9-0206PF	2-6	2-4.8	±5%	2000	-	4.0-5.0	≤4	1.03	306	MYP40-1500	B、B 9.5
MY9-0309L MY9-0309P	3-9	3-7.2	±5%	1000	-	≤6	≤5	1.03	306	MYP40-1500	B、B 9.5
MY9-0612L MY9-0612P	6-12	6-9.6	±5%	880	-	≤8	≤6	1.03	306	MYP40-1500	B、B 9.5


※ CE、RoHS



BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF COUNTER TRIGGER AND PUSH START CLUTCH TYPE SERIES


MYTORQ
ANLIDAR INDUSTRIAL CO.,LTD.

MY8-EP Series


 (Optional)



External Dimension

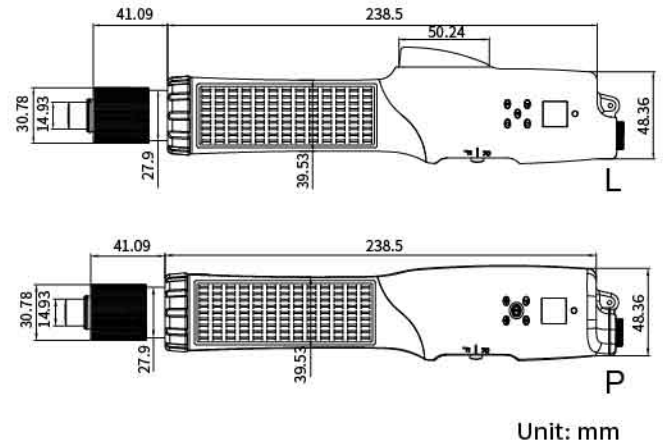

Torque Range Reference Chart

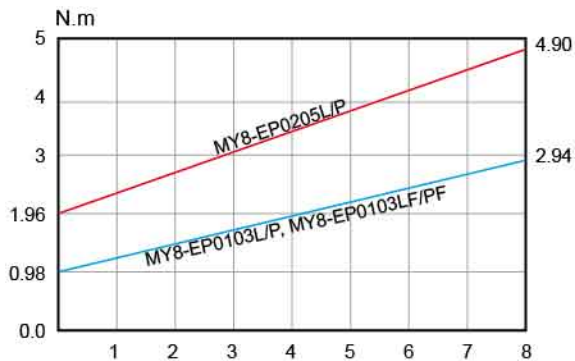


Accessories



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (g)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MY8-EP0103L MY8-EP0103P	0.98~2.94	0.98~2.35	±3%	1000	-	2.6~4.0	2.6~3.5	820	294	MYP40-500	A、B、B 9.5
MY8-EP0103LF MY8-EP0103PF	0.98~2.94	0.98~2.35	±3%	2000	-	2.6~4.0	2.6~3.5	820	294	MYP40-500	A、B、B 9.5
MY8-EP0205L MY8-EP0205P	1.96~4.90	1.96~3.92	±3%	1000	-	4.5~5.0	≤ 4	820	294	MYP40-500	B、B 9.5




※ CE、RoHS

BRUSHLESS HIGH TORQUE DC-TYPE AUTO SHUT OFF TRIGGER AND PUSH START CLUTCH TYPE SERIES

MY8 / MY7 Series




External Dimension

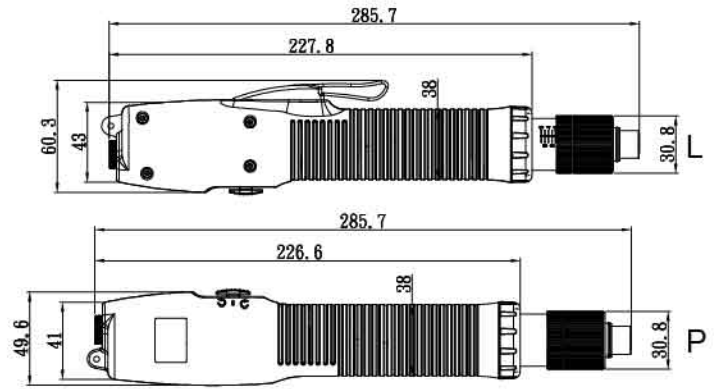

Unit: mm

Torque Range Reference Chart

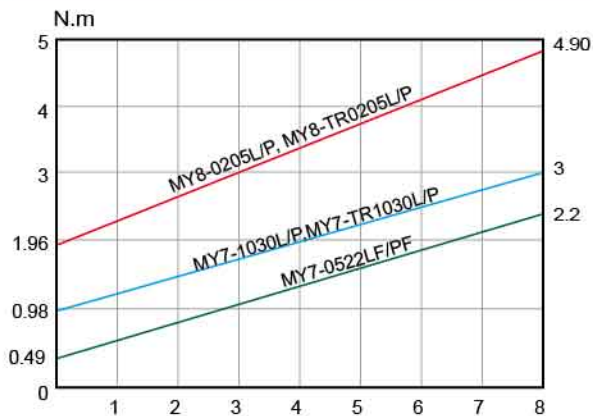


Accessories



Specifications

Model	Torque(N.m)		Repeatable Torque Accuracy(%)	Free Speed (r.p.m)		Screw Size Dia (mm)		Weight (g)	Length (mm)	Power Controller	Bit Type
	Hard Joint	Soft Joint		HI	LO	Machine Screw	Tapping Screw				
MY8-0205L MY8-0205P	1.96~4.90	1.96~3.92	±3%	1000	-	4.0~5.0	≤4	790	290	MYP40-500	B、B 9.5
MY7-1030L MY7-1030P	0.98~2.94	0.98~2.35	±3%	1200	900	2.6~4.0	2.6~3.5	790	290	MYP32-300	A、B、B 9.5
MY7-0522LF MY7-0522PF	0.49~2.16	-	±3%	2000	-	2.6~4.0	2.6~3.5	790	290	MYP32-300	A、B、B 9.5

※ CE (Not included MY7-0522LF/PF)
RoHS



Introduction



MYPC32-100
MY7 Series

MYPC40-500
MY2 Series
MY5 Series
MY7 Series
MY8 Series

MYT-0320/0830/0205
(Not included fast speed type / MYT-2507)

MYPC40-1500
All High Torque Models

Features of MYPC40-500 / MYPC40-1500


- High / Low speed switch / Hi/Lo voltage switch protection function
- Slow start time (0.0-9.9 second)
- Slow start speed Level (35%-100% of normal speed,L0-L9)
- Target reached Confirm (enable / disable)
- Input / Output function control
- External start Input Control
- External reverse Input Control
- External enable Input Control
- External confirm Input Control
- Expanding 5 sets data memory
- Auto-Learning function for time monitoring
- Before tightening reverse
- After tightening reverse
- Counting mode (count up / count down)
- Signal output (OK 1/ OK ALL / N.G)
- Cancel NG signal (Use external Clear or Confirm button to cancel NG signal)
- Operation complete time
- Self locking when counter detect error (enable / disable)
- Sensor mode (Applications according to different operation use)
- Error code by monitoring
- Strong anti-interference capability



ERROR PROOF COUNTER

MYPC32-100 [Error Proof / Power Supply]

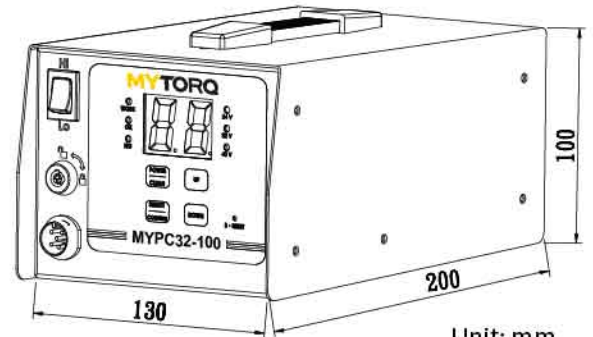

External Dimension



Unit: mm



Specifications

Model	MYPC32-100
Input Voltage	AC 100~240V 50/60HZ
Output Voltage	DC 32V / 24V 1.875A
Power Consumption	60W
Count	1~99
Count method	Count-up / Count-down
Work with Sensor	ON / OFF
GATE Sensor	ON(2 Sensors) / OFF(1 Sensor)
Slow-start time adjustable	0~9.9 seconds
Slow-start speed adjustable	L0 : 100%, 35%~85% L0~L9 Rated speed
Running Time limit-LO	0.00~9.99 seconds
Running Time limit-HI	0.0~9.9 seconds
Reminder Mode	ON / OF / FF / EF with LED and buzzer
Auto ZERO	ON / OFF
External inputs	Forward / Reverse / Disable / Confirm / Sensor / Clear
External outputs	OK / NG / OK ALL
Screwdriver Control	HI / LO : Slow-Start
Outside Dimensions	200X130X100(mm)
Weight(Kg)	1.57
Accessories	Power cordX1、KeyX2
Remark	  
Applicable Models	MY2(Series) MY5(Series) MY7(Series)




ERROR PROOF COUNTER


MYPC40-500 / MYPC40-1500 [Counter / Power Supply]



External Dimension

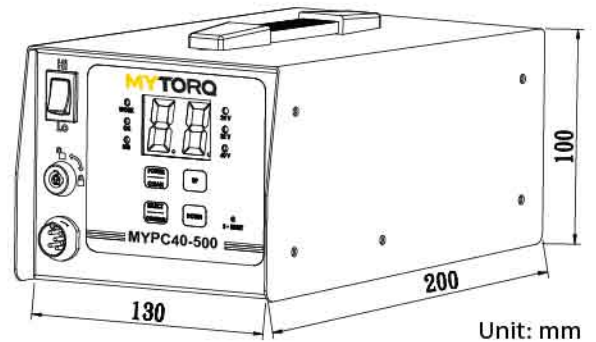

Specifications

Model	MYPC40-500	MYPC40-1500
Input Voltage	AC 100V-240V / 50HZ / 60HZ	AC 110V / 50HZ, 230V / 60HZ
Output Voltage	DC 40V / 32V / 24V 5A	DC 40V / 32V / 24V 9A
Power Consumption	200W	360W
Batch Count	1-99	
Count method	Count-up / Count-down	
Reverse Resuming	ON / OFF	
Work with Sensor	ON / OFF	
GATE Sensor	ON(2 Sensors) / OFF(1 Sensor)	
Slow-start time adjustable	0-9.9 seconds	
Slow-start speed adjustable	LO:100%, 30%-90% L1-L9 Rated speed	
Running Time limit-LO	0.00-9.90 seconds	
Running Time limit-HI	0.0-9.9 seconds	
Reminder Mode	ON / OF / FF / EF with LED and buzzer	
Auto ZERO	ON / OFF	
External inputs	Forward / Reverse / Disable / Confirm / Sensor / Clear	
External outputs	OK / NG / OK ALL	
Screwdriver Control	HI / LO : Slow-Start	
Dimensions	247X130X100(mm)	
Weight(Kg)	2.4	
Accessories	Power cordX1 \ KeyX2	
Remark	  	
Applicable Models	MY2 Series MY5 Series MY7 Series MY8 Series MYT-0320/0830/0205 (Not included fast speed type / MYT-2507)	All High Torque Models



KFR-1050



KFR-1050


Features

- **Hooper capacity**
200-220 cc.
- **Special screw supported**
Applicable Thread length to thread diameter ratio = 1:1 or 1<1.
Screw with washer.
- **Smooth screw feeding**
No screw overlay or jammed.
- **Adjustable feeding rail**
Feeding rail can be adjusted to serve different screws.
- **Independent driving system for feeding and vibration**
- **Simple installation**
Instant plug and play.

Specifications

Model Name & Number	KFR-1050 Automatic Screw Feeder
Size	182(L)X126(W)X147(H) mm
Weight	N.W. : Approx 2.17 Kgs (excluding switching adapter)
Power Source	AC 100~240V
Switching Adapter	DC 15V Switching Adapter
Delivery Speed	42~90 pcs/min (0.7~1.5 Sec)
Feeding	Chamber Blanking
Scooping Chamber Capacity	200~220 cc

KFR-1050 Applicable screw size

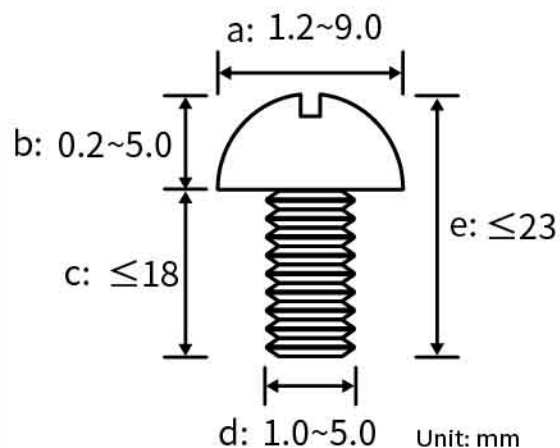

KFA-0830 / KFA-0850A(H)



KFA-0850A
(VACUUM PICK UP TYPE)



KFA-0850H
(MANUAL PICK UP TYPE)



KFA-0830


Features

- **APPLICABILITY OF SPECIAL SCREW TYPES :**
Applicable Thread length to thread diameter ratio = 1:1 or 1<1.
Screw head minimum thickness 0.2mm
- **BRUSHLESS MOTOR :**
Adopted durable maintenance free made in Japan brushless motor.
- **CHANGEABLE RAILWAY :**
High precision wire cut changeable railway. Changeable rail, screw size from 0.8mm up to 5.0mm.
- **HORIZONTAL LINEAR FEEDING :**
Horizontal linear feeding, adopting durable aluminum extruded rail. Screws are carried on a horizontal track for smooth feeding.
- **COUNTER :**
Material shortage alert and screw taking counting function in digital display.
- **SIGNAL OUTPUT FUNCTION :**
Screws in position signal output.


Specifications

Model Name & Number	KFA-0830	KFA-0850A(H)
Size	182(L)X124(W)X146(H) mm	182(L)X124(W)X150(H) mm
Weight	3.0kg (w/o adapter)	3.1kg (w/o adapter)
Power Source	AC 100~240V	
Switching Adapter	DC 12V Switching Adapter	
Delivery Speed	46~50 pcs/min (1.2~1.3 Sec)	42~90 pcs/min (0.7~1.5 Sec)
Feeding	Chamber Blanking	
Scooping Chamber Capacity	200~220 c.c	

KFA-0830 Applicable screw size

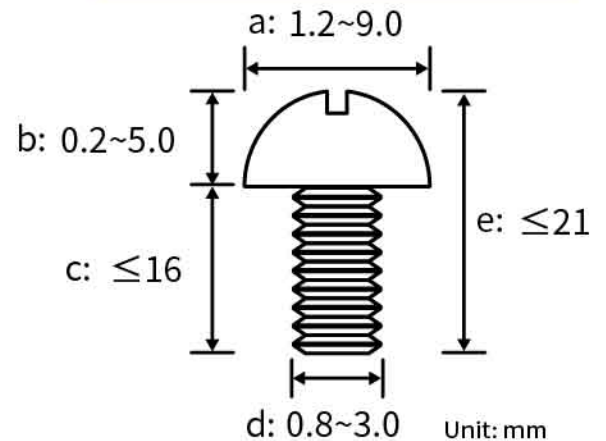

KFA-0850A(H) Applicable screw size

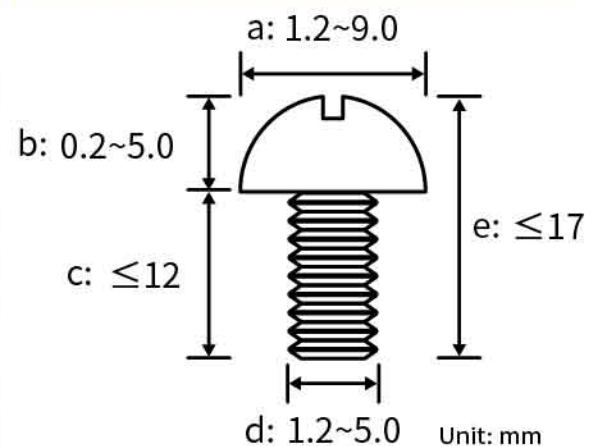

KFA-2060A(H)



KFA-2060A



KFA-2060H


Features

- **BRUSHLESS MOTOR :**
Adopted durable maintenance free made in Japan brushless motor.
- **COUNTER :**
Material shortage alert and screw taking counting function indigital display.
- **SIGNAL OUTPUT FUNCTION :**
Screws in position signal output .

Specifications

Model Name & Number	KFA-2060A(H)
Size	250(L)X163(W)X183(H) mm
Weight	4.5kg (w/o adapter)
Power Source	AC 100~240V
Switching Adaptor	DC 12V Switching Adaptor
Delivery Speed	40~80 pcs/min (1.2~1.3 Sec)
Feeding	Chamber Blanking
Scoping Chamber Capacity	600 c.c

KFA-2060A(H) Applicable screw size

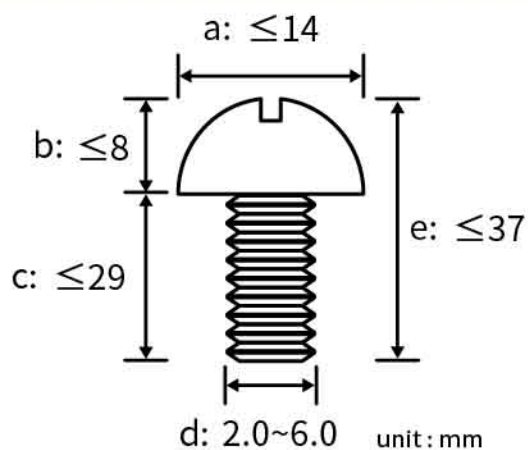

KTM-1000 , KTM-250 , KTM-150

KTM-250



KTM-1000



KTM-150



KTM-150, KTM-250, KTM-1000

- LED can identify the test range of torque setting by needed user. If the result is not complying to torque range setting, light will be warned.
- USB connector is only used for data output : it is convenient for user to work with computer.
- Auto-zero can be selected and zero reset becomes unnecessary for user.
- Automatically test values about maximum, minimum and mean.
- ✳ Products are suitable for shut off type screwdriver only.

Specifications

Model	KTM-1000	KTM-250	KTM-150	
Measuring Ranges	(kgf.cm)	50~1000	3.0~250.0	1.5~150.0
	(Lbf.in)	45~885	3.0~217.0	1.5~130.0
	(N.m)	5~100	0.30~25.00	0.15~15.0
Accuracy	+/- 0.5%(20~100N.m) +/- 1.0%(10~20N.m) +/- 2.0%(5~10N.m)	+/- 0.5%		
Power Supply	3.7V, 4400mAh Lithium Ion	4.8VDC (Ni-MH chargeable battery 1.2VX4 cell 1650mAh)		
Charging Time	8 hours	From empty -3 hours		
Operation Time	8 hours(non stop)	About 12 hours		
Battery Life	Chargeable for 300 times or more. However, it varies depending on operating conditions.			
Size(mm)	229(W)X102(D)X80(H)	160(W)X210(D)X45(H)	230(W)X125(D)X65(H)	
Weight(kg)	2.7	2.0	1.8	
Exclusive Charger	Input : AC100V~240V 50/60Hz Output : DC5V 1.0A Max	Input : AC100V~240V 50/60Hz	Output : DC12V 400mA	
Accessory	Torque measuring adaptorX1 SJ-1000	Torque measuring adaptorX1 AJ-250	Torque measuring adaptorX3 AJ-150 / AJ-50 / AJ-15K	

KP-AUX Series



KP-AUXA, KP-AUX1T


- Provide with the rocker arm , enable to revolve on 360 degrees.
- Main shaft can be extended to maximum 830mm
- Power arm inside includes nitrogen gas stick , allow user to grab the arm easily, automatic lift up to position after finishing the work .
- Easy to assemble and Disassemble.
- Optional accessory KP-VA1, KP-VA2, KP-VAR (90 degree adapter) is available for user to Adjust angle in accordance with the object to be fastened.



KP-VAR, KP-VA1


Model	KP-AUXA	KP-AUXA-1	KP-AUXA-2	KP-AUX1T-B	KP-AUXA-500
Description	Cantilevered	Cantilevered	Cantilevered	Cantilevered	Cantilevered
Reach	50mm~830mm	50mm~830mm	50mm~830mm	50mm~830mm	50mm~830mm
Gas Stick	25kg	30kg	25kg	25kg	35kg
Applicable Models	MYR Series <i>MYR 0825LF/PF/1235/2050 Series Not included</i>	MYR Series	MY9 Series	MY7 Series MY8 Series MY8-EP Series	MYR-0825LF/PF MYR-1235 Series MYR-2050 Series
Remark	—	KP-VAR Optional Accessories	—	KP-VA1 Optional Accessories	KP-VA2 Optional Accessories

※The auxiliary arm can be used only with MYTORQ electric screwdrivers.

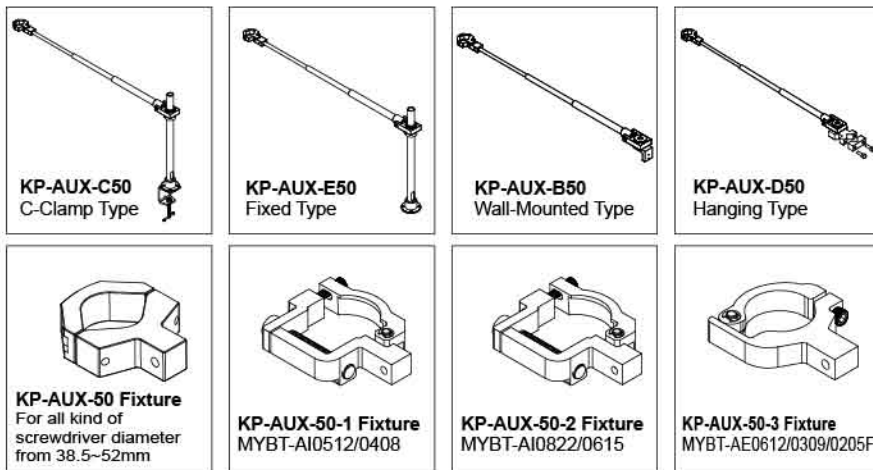


Model No.	Max torque (Nm)	A(mini/maxi) cm	Tool Ø diameter(mm)
KP-AUX-C50-1000	50	43~100	38.5~52
KP-AUX-C50-1200	50	50~120	38.5~52
KP-AUX-E50-1000	50	43~100	38.5~52
KP-AUX-E50-1200	50	50~120	38.5~52
KP-AUX-B50-1000	50	43~100	38.5~52
KP-AUX-B50-1200	50	50~120	38.5~52
KP-AUX-D50-1000	50	43~100	38.5~52
KP-AUX-D50-1200	50	50~120	38.5~52

※Please inform which screwdriver series will be with the auxiliary arm before releasing order.

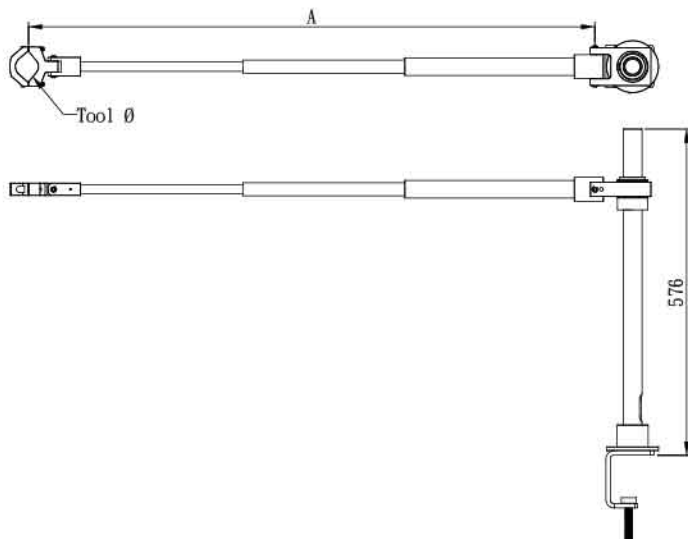


KP-AUX Series

KP-AUX-TL-450N

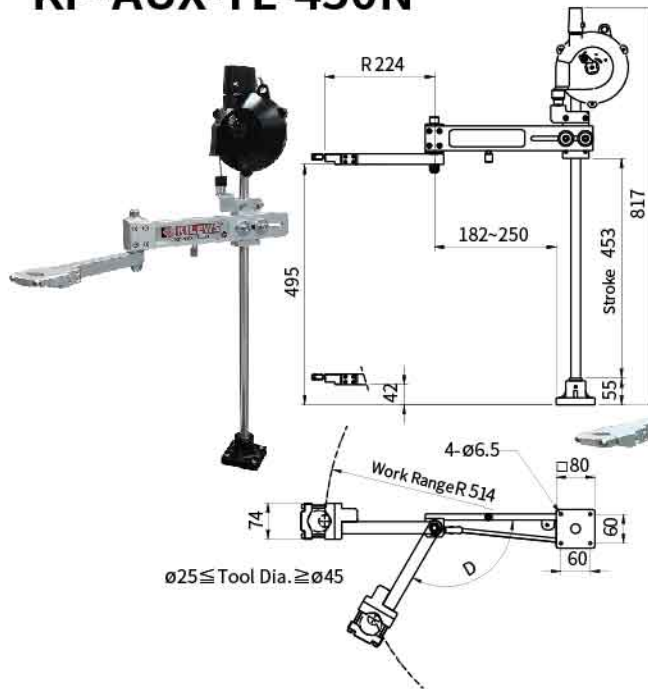


KP-AUX-TL-700N

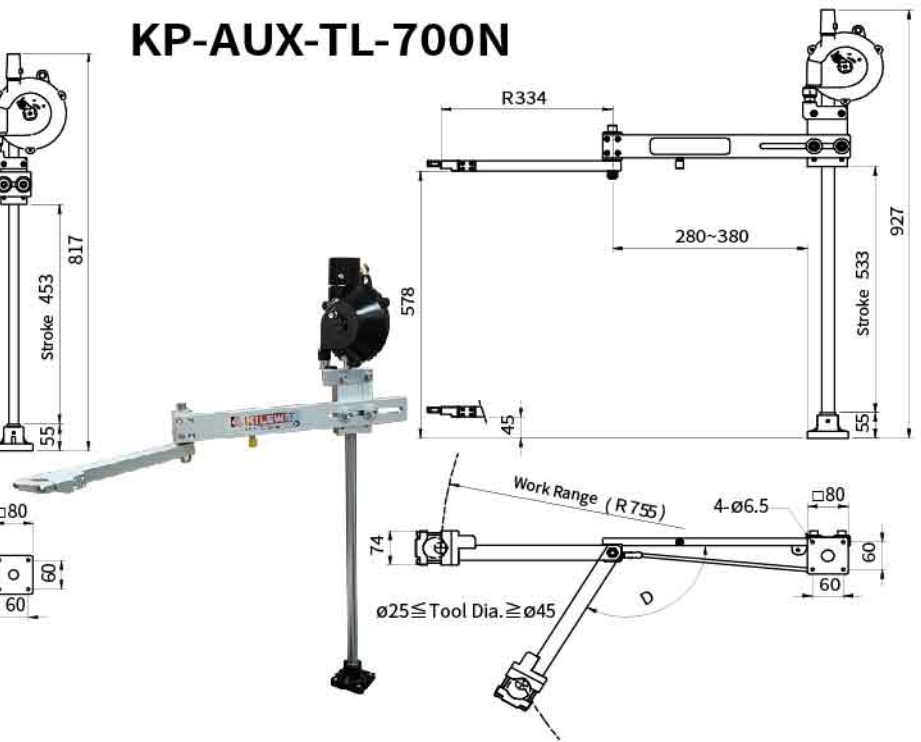


Model	KP-AUX-TL-450N	KP-AUX-TL-700N
Applicable Tool Weight	0.8~2.8kg	1.4~3.4kg
Max Working Area	514mm	755mm
Max Torque	150Kgf-cm	250Kgf-cm
Tool Dia.	25~45mm	25~45mm

KP-AUX-TI-300N

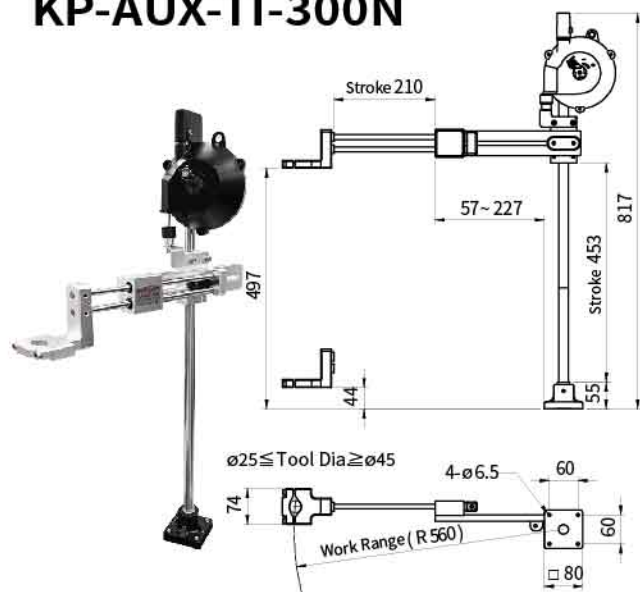

KP-AUX-TI-600N

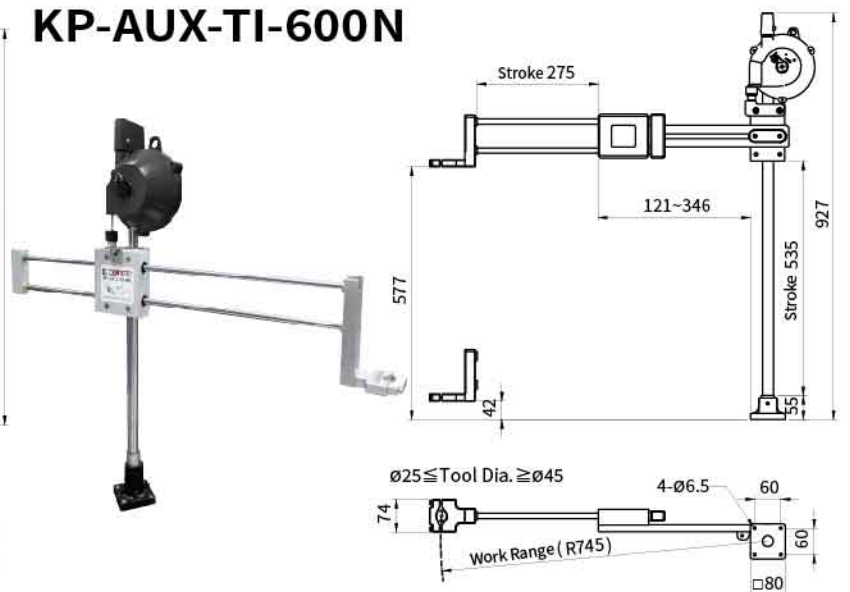

Model	KP-AUX-TI-300N	KP-AUX-TI-600N
Applicable Tool Weight	0.8~2.8kg	0.4~2.4kg
Max Working Area	560mm	745mm
Max Torque	150Kgf-cm	250Kgf-cm
Tool Dia.	25~45mm	25~45mm




Carbon Fiber

Features

- High stiffness
- High tensile strength
- High chemical resistance
- High temperature tolerance
- Super lightweight
- Low thermal expansion

External Dimension

Applicable tool diameter

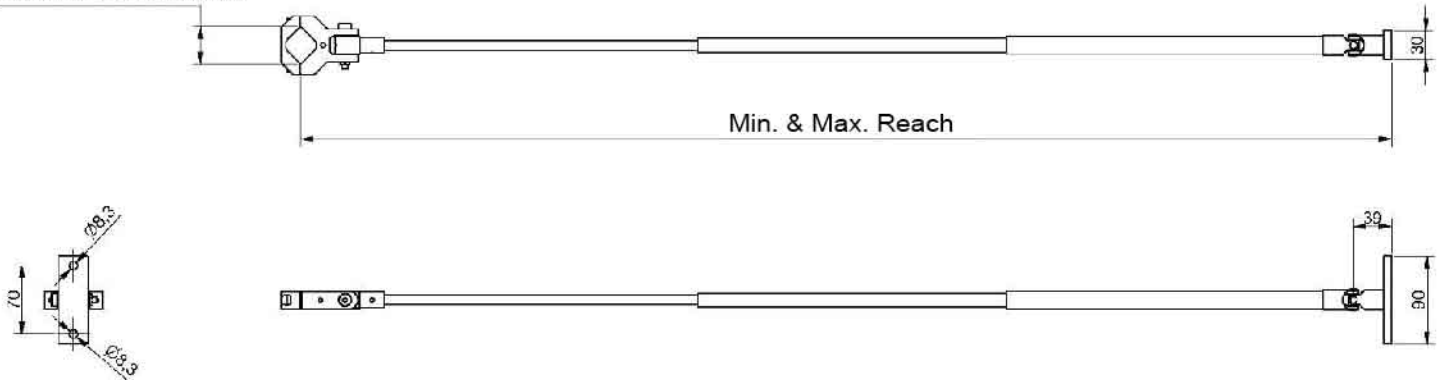

Specifications

Model	Max. Torque	Min. Reach	Max. Reach	Applicable tool dia.	weight
KP-AUX-GC18I-600	18Nm	414mm	665mm	Ø28-56mm	320g
KP-AUX-GC18A-600	18Nm	414mm	665mm	Ø28-56mm	440g
KP-AUX-GC18I-1000	18Nm	503mm	1123mm	Ø28-56mm	360g
KP-AUX-GC18A-1000	18Nm	503mm	1123mm	Ø28-56mm	480g

※ I = For inline screwdriver
A = For pistol screwdriver

[MY-SIO, KL-SSBN, KL-1, KL-3]

Screwdriver I/O Signal Control Box(For Manual / PLC)



MY-SIO

- Slow Start time (0.0-9.9 second)
- Slow start Speed (30%-100% of normal speed,L0-L9)
- Operation Time (0.0-9.9 second)
- Target Reached Confirm (enable / disable)
- Brake Signal Hold Time (start off / next start off)
- External Start Input Control
- External Reverse Input Control
- Signal output (Start,Stop,Reverse)



+



+



MYP40-500 / MYP40-1500
POWER CONTROLLER



Slow Start Control Module

KL-SSBN

- BYPASS: Automatically disable slow start function when screwdriver in reverse rotation, easier to reverse screws.
- Adjustable slow start speed from 30% to 100% of normal speed, Slow start level setting from L1-L2-L3-...L9-L0
- Provide output start signal/ break signal/ forward and reverse signal with MOS relay switch
- Compatible with MYTORQ Brushless DC MY8 series
- Slow start time can be set from 0.1 s up to 9.9 second
- Dimension : 58x95x35mm (LxWxH)

Specifications

Model	90 Degree Attachment Applicable Model
KL-1	MY7-1030L,MY8-0205L ※only for B type
KL-3	Suitable for all MYR series except MYR-0825L, MYR-0825LF, MYR-1235L, MYR-2050L, Applying for B type or W type.

※ Only for "L" trigger start screwdrivers

90 Degree Attachment



KL-1



KL-3



Screwdriver Holder

Model	Applicable Models
KH-2	MY-SAVER3mini MYT-0320/0830/0205/0103F/1235F/0205F/2507
KH-6	MY-SAVER3/5/7 MY9 Series
KH-7	MY-SAVER12/18 MYT-0206/0309/0412/0618
KH-2L	MY-SAVER3mini/3/5/7/12/18 MY7 Series MY8 Series

- The new Screwdriver Holder series can be fixed on the table or wall. Position angle of the rack can be adjusted for operator easier to pick up and restore the screwdriver.

Torque Locker



Model	Applicable Models
KC-2(S)	MY7 Series MY8 Series
KC-7C(S)	MY8-EP Series
KC-21A	MYT-0206/0309/0412/0618
KC-22A	MYR Series
KC-27-1A	MY9 Series
KC-28A	MYT-0320/0830/0205/0103F/ 1235F/0205F/2507



Spiral Cables

Applicable Models
Supplying spiral cable for all of MYTORQ screwdrive with 6 pin.



Torque Adjuster

Model	Applicable Models
KW-1	MY7 Series MY8 Series MY8-EP Series



Pistol Grip

Model	Applicable Models
LG-12	MY8-EP(L) Series
PG-12	MY8-EP(P) Series
LG-15S	MY-SAVER3/5/7
LG-16S	MY-SAVER12/18

Screw Setter



Model	Applicable Models
KB-1	M1.7~2.0 Screw available
KB-2	M2.0~2.6 Screw available
KB-3	M3.0~4.0 Screw available



Spring Balancer

Model	Applicable Models
KL-1200 0.6~1.5kg	USE FOR MY7, MY8 / MY8-EP Series
KL-2000 1.0~2.0kg	USE FOR ALL MODELS

