

S-series

Reliability and results.

- High quality polyurethane hose
- Easy couplings are equipped

Air	Model	Size	I.D./Length	Hose	MPa	Dimension(mm)	Weight(Kg)
	SHS-210Z	S	6.5mmx10m	PU	1.4	314x290x152	3.5
	SHS-310A	S	8.0mmx10m	PU	1.4	314x290x152	3.5
	SHR-35Z	M	8.0mmx15m	PU	1.4	408x384x173	6.8

Cord	Model	Size	Outlet Cord	Power Rating	Dimension(mm)	Weight(Kg)
	SCS-310	S	1.25sq/3coresx10m	125V/6A 250V/6A	314x290x164	4.9

Water	Model	Size	I.D./Length	Hose	MPa	Dimension(mm)	Weight(Kg)
	SWS-210A	S	6.0mmx10m	PVC	1.4	314x290x152	3.7


* Length of air hose can adjustable, Please contact phone number for more information

Information For Cord Reel

Safety Device
Safety Thermostat
Thermostat sensor

prevents over heating of the reel. It shuts off the current when the temperature reached around 70°C and restores automatically when the temperature goes down.

Plug/Socket option

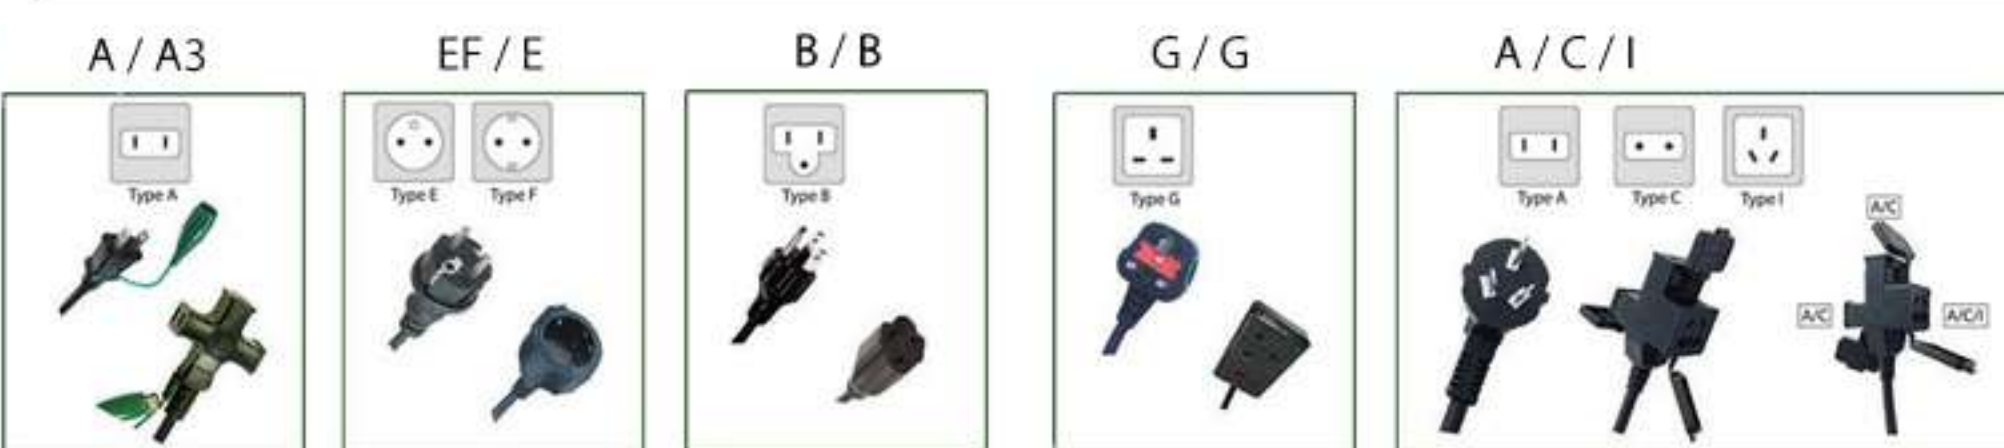

M-series

W-series reels are designed for extreme space-restricted applications. Perfect for under work bench mounting



Air Reel	
Model	MMA-315
Fluid	Air
Hose	PU Hose
I.D.(mm)	8.0
Length (M)	15
End Fittings	Rc 1/2
Hose Joint	G 1/2 Female Thread
Fittings	R 1/2
Pressure	1.4 MPa
Temperature limits	-5~50°C
Hose Temperature	-30~60°C
Weight	15.9Kg

NEW!

Making more comfortable to use with double arm design. Suitable for heavy duty industrial.

6Kg! loose weight by compare to old model (Z-SERIES)

G-series

Dual pedestal for heavy duty applications. Handles wide range of fluid.

	Model	Outlet hose			MPa	inlet hose		weight (kg)	
		I.D.(mm)	m	fittings		hose	m		fittings
air	GM 1 A-320	8.0	20	Union G 3/8 Female	PVC	1.4	1.0	Union G 3/8 Female	16.9
air	GM 1 A-420	13.0	20	Union G 1/2 Female	PVC	1.4	1.0	Union G 1/2 Female	18.8
water	GM 1 W-320	8.0	20	Union G 3/8 Female	PVC	0.5	1.0	Union G 3/8 Female	16.9
water	GM 1 W-420	13.0	20	Union G 1/2 Female	PVC	0.5	1.0	Union G 1/2 Female	18.8
oil	GM 1 O-320	9.5	20	Union G 3/8 Female	1 braid	7.0	1.0	Union G 3/8 Female	22.4
oil	GM 1 O-415	12.7	15	Union G 1/2 Female	1 braid	7.0	1.0	Union G 1/2 Female	32.0

Air Hose Reels Water Reels Oil Reels



E-series

Enclosed Heavy Duty Hose reels

	Model	outlet hose				MPa	inlet hose		weight (kg)
		I.D.(mm)	m	fittings	hose		m	fittings	
air	ESA-315	8.0	15	Union G 3/8 Female	PVC	1.4	1.0	Union G 3/8 Female	17.4
air	ESA-410	13.0	10	Union G 1/2 Female	PVC	1.4	1.0	Union G 1/2 Female	18.8
water	ESW-315	8.0	15	Union G 3/8 Female	PVC	0.5	1.0	Union G 3/8 Female	17.4
water	ESW-410	13.0	10	Union G 1/2 Female	PVC	0.5	1.0	Union G 1/2 Female	18.8
oil	ESO-310	9.5	10	Union G 3/8 Female	1 braid	7.0	1.0	Union G 3/8 Female	19.6
oil	ESO-410	12.7	10	Union G 1/2 Female	1 braid	7.0	1.0	Union G 1/2 Female	20.7
grease	ESG-210	6.2	10	Union G 1/4 Female	2 braid	28.0	1.0	Union G 1/4 Female	19.7
grease	ESG-310	9.3	10	Union G 3/8 Female	2 braid	28.0	1.0	Union G 3/8 Female	21.6

Air Hose Reels Water Reels Oil Reels Grease Reels



G-series

rubber hose

Equipped with authentic rubber hoses from Bridgestone

	Model	Outlet hose		hose	MPa	inlet hose		Dimension
		I.D.(mm)	m			m	m	
air	GS1A-310	9.5	10	Rubber	1.4	1.0	461x447 x245	
air	GS1A-315	9.5	15	Rubber	1.4	1.0		
air	GS1A-410	12.7	10	Rubber	1.4	1.0		

Air Hose Reels

- more heat & oil resistant than hydraulic hoses
- excellent in anti-static feature
- Japan Quality hoses from Bridgestone



W-series

Super Compact frame reel makes you install everywhere you want

- Unique design to fit in well with open space
- Easy-to integrate into other air tools and equipment

Model	Outlet Hose				MPa	Inlet Hose			Dimension(mm)			Weight (Kg)
	I.D.(mm)	m	Outlet	hose		m	Inlet	A	B	C		
WHC-206B	6.5	6	Female G1/4	PU	1.4	0.8	Swivel fitting male R1/4	228	272	146	2.7	
WHC-303B	8.0	3	Female Rc3/8	PU	1.4	1.0	Swivel fitting male R3/8	228	272	146	2.8	

comes with mounting base set

Model	Outlet Cord			Power Rating	Inlet Hose	Dimension(mm)			Weight (Kg)	
	Wire	m	Outlet			m	Inlet	A		B
WCC-306B	1.25 x 3	6	Outlet w/ground clip	AC125V/6A AC250V/6A	0.8	plug (w/ground clip)	228	272	147	3.0

comes with mounting base set

Outlet Cord Reels Control Switch Reel

L-EDGE LIGHT

Comes with magnet for more comfortable using

- Rechargeable LED
- Easy couplings are equipped

Power	illuminance	Consumption	Battery	Max burn time
AC 100-240V	240lm	4.65W	Lithium Ion	5HRS

Previous light	L-EDGE LIGHT
120°C	200°C



Model	length(m)	Power Rating	Recharge/ Lighting hours	Dimensions(mm)	Weight(g)
LEL-03A-S	-	AC125V / AC250V	4hours / 5hours	350 x 65 x 42	415



Code for watch captain light movie link

Tough outer body that passed drop test
Dust and water proof that certified as IP44 . .

Made in Japan